



U
L
NOGA **MT**
I
M
A
T
E



ULTIMATE SERIES

Welcome to NOGA MT **Pioneering Precision Since 1980**

For over four decades, NOGA has been at the forefront of precision engineering, delivering innovative deburring solutions that set the benchmark for industry excellence.

Our esteemed ULTIMATE SERIES features specialized tools such as UFIBER, a line of advanced ceramic finishing tools including Ceramic Fiber Brushes, Radial Ceramic Fiber Discs and Ceramic Diamond Stones, engineered for precision deburring, grinding, polishing and surface finishing applications. UBURR for front and back deburring, UBACK with USPOT for through-hole counterboring and UBACK with UCHAMF for through-hole countersinking.

From our beginnings with hand deburring tools to the development of advanced machine deburring systems under NOGA MT (NOGA Machine Tools), we proudly serve the rigorous demands of metalworking and machining professionals across the globe.

ULTIMATE THE PRODUCT! LINES

OUR ULTIMATE PRODUCT LINES

UFIBER

Discover the future of precision finishing with UFIBER, our advanced ceramic finishing tool line. From ceramic fiber brushes and radial ceramic fiber discs to ceramic diamond stones, UFIBER delivers exceptional performance in deburring, grinding, polishing and surface finishing. Designed for a wide range of materials, including hardened steels, titanium, Inconel and composites, UFIBER supports CNC, robotic and manual applications with consistent precision and efficiency.

UBACK

The UBACK brings together the innovative UX Tool-holders powered by **MT DURASHIELD** with the advanced SolidCAM software and USPOT/UCHAMF inserts to redefine machining precision. Featuring a patented hydraulic mechanism that ingeniously uses the machine's coolant system which delivers exceptional control over insert movement.

THE RESULT - Unparalleled accuracy, repeatability and streamlined operations for back counterboring, back countersinking, and back spot-facing tasks.

With its advanced engineering, ULTIMATE Back eliminates the need for workpiece rotation, effortlessly performing operations in a single pass while significantly boosting productivity and efficiency.

UBURR

Revolutionary automatic deburring tools featuring precision-engineered cutting blades with innovative geometry, complemented by our **MT DURASHIELD** advanced tool-holders. UBURR represents the perfect fusion of efficiency and precision in automated deburring processes.

ULTIMATE THE PRODUCT ! LINES

THE NOGA MT DIFFERENCE

Our commitment to excellence extends beyond our products. With a dedicated team of industry professionals, we provide:

EXPERT TECHNICAL SUPPORT AND CONSULTATION

INNOVATIVE SOLUTIONS FOR COMPLEX MACHINING CHALLENGES

RESPONSIVE CUSTOMER SERVICE

Ready to elevate your manufacturing process?

Discover how NOGA MT's precision engineering solutions can enhance your machining operations. Our comprehensive range of products combines innovation with reliability to deliver superior results for your specific applications.

Excellence in engineering, precision in practice – NOGA MT

ULTIMATE THE SERIES !

UBACK


Tool Holders Support Pilot Hole Diameters Ød
Ranging from Ø8.0-25.0mm (0.315-0.984")

UFIBER



Advanced Ceramic Finishing Tools

- Ceramic Fiber Brushes
- Radial Ceramic Fiber Discs
- Ceramic Diamond Stones




USPOT



Through-hole Back Counterbore or Spotfacing

Diameters from
Ø8.5-57.5mm (0.335-2.264")
Semi-Standard or
Tailor-made Inserts

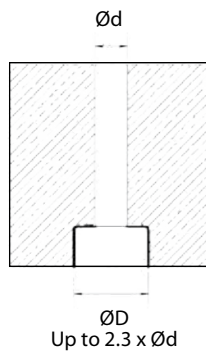


UCHAMF



Through-hole Back Countersink or Chamfering

Diameters from
Ø8.5-47.0mm (0.335-1.850")
Available with Standard 82°
and 90° Countersink Inserts

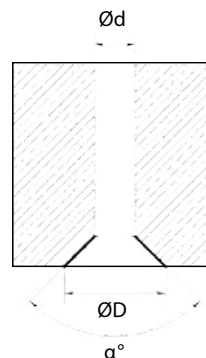


UBURR



Front and Back Deburring

Ød Range of Ø2.5-25mm
(0.0984-0.984")



ULTIMATE TABLE OF CONTENTS



UFIBER ADVANCED CERAMIC FINISHING TOOLS

For precision deburring, grinding, polishing and surface finishing.

The UFIBER range includes Ceramic Fiber Brushes, Radial Ceramic Fiber Discs and Ceramic Diamond Stones for CNC, robotic and manual finishing applications.

Multiple grit ranges from #150 to #6000

PAGES 8-29



UBACK TOOL-HOLDERS

The perfect combination of UBACK Tool-holders and UCHAMF & USPOT inserts.

A sophisticated mechanism engineered for high-precision machining. The blade is activated through the machine's internal pressure system, compatible with liquid coolant, air, or MQL for seamless operational control.

Pilot-hole range from Ø8mm (0.315") up to Ø25mm (0.984")

PAGES 30-49



UBURR Deburring the front and back of a drilled through hole.

UBURR deburring tools providing a quick, effective, reliable and consistent deburring way of front and back side bore edges of a drilled hole in one single pass.

Efficient and convenient tools for long service life and competitive pricing.

Pilot-hole range from Ø2.5mm (0.0984") up to Ø25mm (0.984")

PAGES 50-65



USPOT INSERTS Back Counterbore or back Spotfacing of a drilled through hole.

Diameter range from Ø8.5-57.5mm (0.335-2.264").

Available as Semi-Standard Inserts.

PAGES 35-38

UFIBER The ULTIMATE Agent's Kit

A range of complete demo kits for **USERIES** tools



PAGES 66-67



UCHAMF INSERTS Back Chamfering or back Countersink of a drilled through hole.

Diameters from Ø8.5-47.0mm (0.335-1.850").

Available with Standard 82° and 90° Countersink Inserts and Semi-Standard Inserts.

PAGES 39-43

ULTIMATE **DURASHIELD!**

A MARK OF EXCELLENCE



DURASHIELD represents NOGA MT's commitment to premium quality tool-holders. When you spot this distinctive logo, you're assured of a product engineered for superior performance in the most challenging industrial applications, manufactured from Precipitation Hardened AISI 17-4 PH for outstanding durability and performance.

These tool-holders establish new industry benchmarks through:

ADVANCED corrosion resistance technology.

ENHANCED structural integrity.

EXTENDED tool life capabilities.

EXCEPTIONAL performance standards.

UNMATCHED reliability in demanding environments.

ULTIMATE DURASHIELD !

MT DURASHIELD CORE FEATURES

PERFORMANCE CHARACTERISTICS

SUPERIOR STRENGTH: Engineered to handle heavy-duty loads with confidence.

ENHANCED TOUGHNESS: Maintains consistent reliability under the most demanding operational conditions.

ADVANCED WEAR RESISTANCE: Significantly extends tool lifespan while reducing operational costs.

PRECISION MACHINABILITY: Enables the creation of highly precise tool-holder designs.

THERMAL RESILIENCE: Maintains optimal performance even at elevated temperatures.

CORROSION PROTECTION: Specifically designed to withstand harsh industrial environments.

ENVIRONMENTAL INNOVATION

The NOGA MT **DURASHIELD** tool-holder line features an innovative passivation process that:

ENHANCES corrosion resistance naturally.

ELIMINATES the need for additional protective coatings.

REMOVES requirements for supplementary chemicals.

STREAMLINES the production process.

REDUCES environmental impact.

PROVIDES an environmentally conscious approach to corrosion protection.

ULTIMATE **UFIBER!** PRODUCT RANGE

ADVANCED CERAMIC FIBER TOOLS



NOGA MT **UFIBER** is a comprehensive line of advanced ceramic finishing tools, including Advanced Ceramic Fiber Brushes, Radial Ceramic Fiber Discs and Ceramic Diamond Stones, all engineered for precision deburring, grinding, finishing and polishing applications.

ULTIMATE **UFIBER!** BRUSHES

ADVANCED CERAMIC FIBER BRUSHES


FOR PRECISION AND DURABILITY IN SURFACE TREATMENT

NOGA MT's **UFIBER** brushes are revolutionizing surface treatment with nano-technology precision. These advanced ceramic brushes deliver unparalleled performance, durability, and efficiency for various industrial applications, offering a comprehensive solution for deburring, polishing and finishing tasks.

MAIN BENEFITS

NANO-TECHNOLOGY PRECISION

- Superior surface roughness control.
- Enhanced wear resistance for extended tool life.
- Reduced production costs through fewer tool changes.




**NOGA NANO-TECHNOLOGY
PLATFORM**

**UNMATCHED
PRECISION**

**CUTTING-EDGE
TECHNOLOGY**

**SUPERIOR
PERFORMANCE**



COMPETITORS

**LIMITED
PRECISION**

**OUTDATED
TECHNOLOGY**

**LOWER
DURABILITY**

3-IN-1 FUNCTIONALITY

- Combines deburring, polishing, and finishing in one tool.
- Streamlines operations by reducing tool inventory needs.

AUTOMATION READY

- Seamless integration with CNC machines and robotic arms.
- Enables advanced manufacturing with minimal manual intervention.

WIDE GRIT RANGE

- **UFIBER** bristles are available in 10 different grits ranging from #150 to #6000, providing flexibility to handle various work materials and burr conditions.

UFIBER BRUSHES


GRIT OPTIONS



Wide Grit Range **UFIBER** bristles are available in grits ranging from #150 to #6000, providing flexibility to handle various work materials and burr conditions.

ENHANCED SURFACE FINISHING:


Achieves significantly smoother finishes even on tough materials like hardened steels and composites.

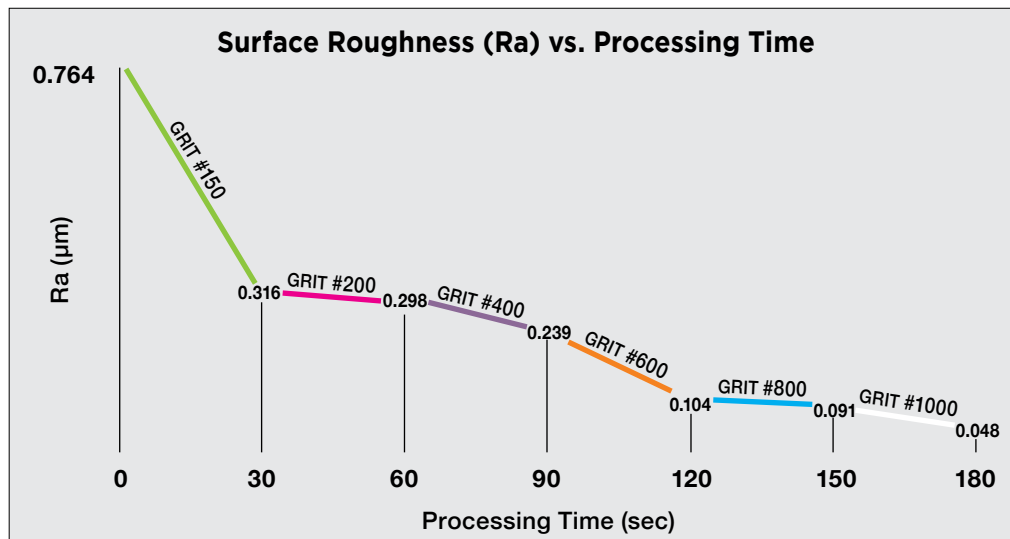

- Material: SAE 1050 / S50C / Wnr. 1.1206
- Rotational speed: 3200 rpm

TIME EFFICIENCY:

UFIBER brushes achieve a 20 X faster machining time compared to manual work (defined as any operation performed by hand without automation) delivering unparalleled efficiency and productivity in automated deburring and polishing.

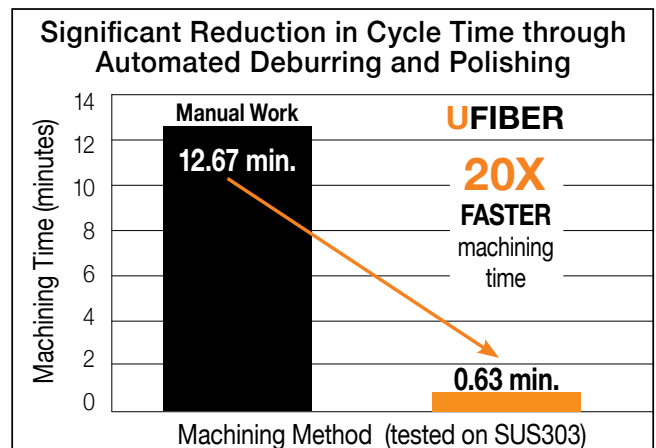

UFIBER BRUSHES

ADDITIONAL FEATURES

VERSATILE APPLICATIONS:

- Compatible with machining centers, lathe machines, drilling machines, robots and hand micromotor devices.

SELF-SHARPENING EDGES:

- Enables consistent grinding performance throughout the tool's life span.

POWERFUL AND DURABLE:

- Strong grinding properties with cutting edges that remain intact for a longer life span.

EXCELLENT SURFACE FINISHES:

- Achieves precise deburring and smooth finishes effortlessly.

COMBINED OPERATIONS:

- Performs deburring and surface finishing in a single operation.

LONG SERVICE LIFE:

- Maximizes productivity and minimizes costs with extended durability.

EASY MAINTENANCE:

- The brushes can be ground or cut to renew their cutting edge.

COMPARATIVE ANALYSIS

FEATURE	NOGA MT UFIBER BRUSHES	COMPETITOR X
MATERIAL TECHNOLOGY	Latest Nano-technology ceramic fibers	Micro-technology ceramic fibers
GRIT RANGE	10 different grit sizes ranging from #150 to #6000	Limited to standard industrial grits
PERFORMANCE	20X faster processing time	Standard edge retention
DURABILITY	High resistance to wear and deformation	Moderate durability
MATERIAL SUITABILITY	All materials including composites	Metals and selected alloys
TOOL LIFE	Long tool-life Due to higher Material Suitability	Lower tool-life Due to lower Material Suitability

UFIBER

APPLICATIONS & PRODUCT RANGE

SURFACE BRUSH



CROSS-HOLE BRUSH



POINT BRUSH




END BRUSH



RADIAL CERAMIC FIBER DISC



CERAMIC DIAMOND STONE

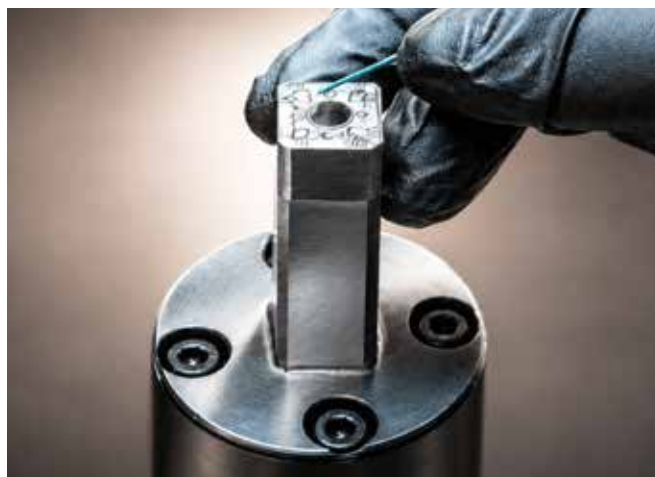

UFIBER

INDUSTRY APPLICATIONS



AEROSPACE

Ensures compliance with strict safety and performance standards for aircraft components.



AUTOMOTIVE

Deburs and polishes engine and transmission parts with precision.

MEDICAL DEVICES

Provides smooth finishes for surgical instruments and implants.



DEFENSE

Delivers high-precision finishing for complex munitions and tactical systems. NOGA MT UFIBER tools provide precision finishing for internal features and cross-holes to meet rigorous tolerance standards without compromising structural integrity.



UFIBER BRUSHES

CROSS-HOLE BRUSHES

Designed for inner diameter polishing and cross-hole deburring. The brush expands due to centrifugal forces, allowing it to conform precisely to the pilot hole diameter, making it versatile for various applications.



- Available Range: **Ø1.5, 3.0, 5.0, 7.0 mm / 0.059", 0.118", 0.197", 0.276"**
10 grits; Ø11 mm / 0.433" - selected grits.
- Expansion Range: **Ø3.5-20mm / 0.138-0.787"**

SURFACE BRUSHES

Designed for surface polishing and deburring, ideal for achieving uniform finishes on flat surfaces.

Tip-cutting brushes are designed to fit into a sleeve with the tool shank, making them ideal for automated deburring in CNC machines, robots and other equipment.

The surface brush can also function as a cross-hole brush, leveraging centrifugal force during rotation to expand and efficiently remove fine burrs from the inner surfaces of cylinders.



UF1625 / UF-FB-W-D025-L75 at 5000 rpm



UF1725 / UF-FB-R-D025-L75 at 5000 rpm



- Available Range: **Ø6, 15, 25, 40, 60, 100 mm / 0.236, 0.590, 0.984, 1.575, 2.362, 3.937"**
and 10 grit sizes for each diameter.

UFIBER BRUSHES

POINT BRUSHES

Suitable for precision work in small or complex geometrical areas. Ideal for removing cutter marks, polishing, and finishing parts with small or narrow geometrical features. Suitable for use in CNC machines, robots or hand-held rotary tools.

- Available Range: **Ø1.0, 1.5, 2.0, 2.5, 3.0 mm / 0.039, 0.059, 0.079, 0.098, 0.118"** and 10 grit sizes for each diameter.



END BRUSHES

Designed for use with hand-held rotary tools and CNC machines, making it ideal for precise finishing tasks, especially in tight or recessed areas where traditional brushes may fall short. This brush features high bending strength and can operate at max. 12000 RPM without the risk of filament breakage.

- Available Range: **Ø5mm / 0.197" - flat surface or 90° angled** and 10 grit sizes for each geometry.



FLAT DESIGN

FLAT DESIGN: Designed for uniform deburring and finishing of flat surfaces and large areas.

MAXIMUM SURFACE INTEGRATION: The precision-ground flat edge delivers absolute consistency across the entire contact zone, ensuring a flawless, uniform finish every time.


VERSATILE USAGE: Suitable for smoothing outer edges, planar surfaces and broader geometries.

ANGLED DESIGN


ANGLED DESIGN: Allows for easy access to tight spaces and hard-to-reach areas.

ENHANCED CONTROL: The pointed edge provides better control for selective deburring tasks.

VERSATILITY: Suitable for deburring geometries with complex shapes and sharp angles.

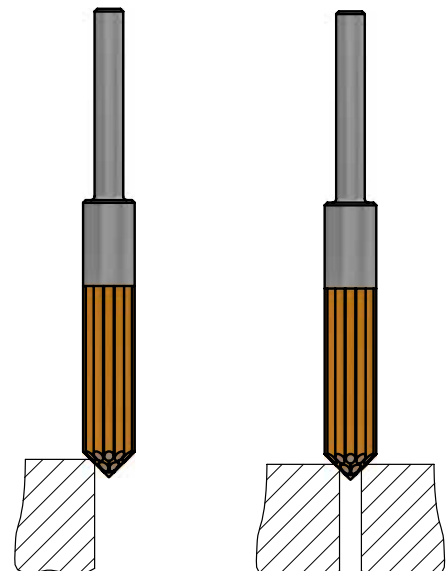

UFIBER

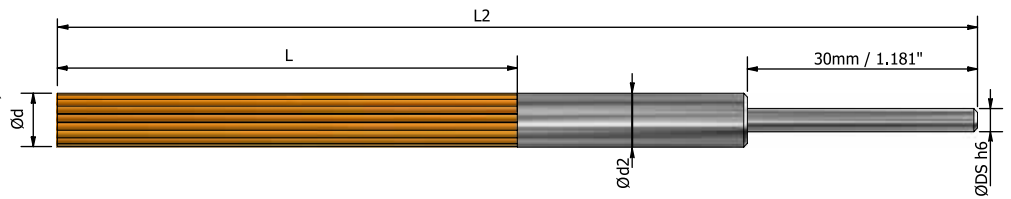


CROSS-HOLE BRUSH

SKU	DESCRIPTION	GRIT SIZE	Ø d mm / inch	L mm / inch	Ø d2 mm / inch	L2 mm / inch	Ø DS mm / Inch	Wt. gram	MAX. RPM	SUITABLE PILOT-HOLE DIA.					
										GRIT #150-#1000 mm / Inch	GRIT #1200-#6000 mm / Inch				
UF2115	UF-CH-G-D015-L50	150	Ø1.5 / 0.059	50 / 1.969	Ø2.5 / 0.098	120 / 4.724	Ø3 / 0.118	3	20000	3.5 - 5 / 0.138 - 0.197	3.5 - 5 / 0.138 - 0.197				
UF2215	UF-CH-P-D015-L50	200													
UF2315	UF-CH-V-D015-L50	400													
UF2415	UF-CH-O-D015-L50	600													
UF2515	UF-CH-B-D015-L50	800													
UF2615	UF-CH-W-D015-L50	1000													
UF2715	UF-CH-R-D015-L50	1200													
UF2815	UF-CH-M-D015-L50	2000													
UF2915	UF-CH-Z-D015-L50	3000													
UF2015	UF-CH-A-D015-L50	6000													
UF2130	UF-CH-G-D030-L60	150	Ø3 / 0.118	60 / 2.362	Ø4 / 0.158	130 / 5.118	Ø3 / 0.118	6	14000	5 - 7 / 0.197 - 0.276					
UF2230	UF-CH-P-D030-L60	200													
UF2330	UF-CH-V-D030-L60	400													
UF2430	UF-CH-O-D030-L60	600													
UF2530	UF-CH-B-D030-L60	800													
UF2630	UF-CH-W-D030-L60	1000		50 / 1.969		120 / 4.724					5 - 7 / 0.197 - 0.276				
UF2730	UF-CH-R-D030-L50	1200													
UF2830	UF-CH-M-D030-L50	2000													
UF2930	UF-CH-Z-D030-L50	3000													
UF2030	UF-CH-A-D030-L50	6000													
UF2150	UF-CH-G-D050-L60	150	Ø5 / 0.197	60 / 2.362	Ø6 / 0.236	130 / 5.118	Ø6 / 0.236	17	14000	7 - 9 / 0.276 - 0.354					
UF2250	UF-CH-P-D050-L60	200													
UF2350	UF-CH-V-D050-L60	400													
UF2450	UF-CH-O-D050-L60	600													
UF2550	UF-CH-B-D050-L60	800													
UF2650	UF-CH-W-D050-L60	1000		50 / 1.969		120 / 4.724					8 - 10 / 0.315 - 0.394				
UF2750	UF-CH-R-D050-L50	1200													
UF2850	UF-CH-M-D050-L50	2000													
UF2950	UF-CH-Z-D050-L50	3000													
UF2050	UF-CH-A-D050-L50	6000													
UF2170	UF-CH-G-D070-L60	150	Ø7 / 0.276	60 / 2.362	Ø8 / 0.315	130 / 5.118	Ø6 / 0.236	24	14000	9 - 14 / 0.354-0.551					
UF2270	UF-CH-P-D070-L60	200													
UF2370	UF-CH-V-D070-L60	400													
UF2470	UF-CH-O-D070-L60	600													
UF2570	UF-CH-B-D070-L60	800													
UF2670	UF-CH-W-D070-L60	1000		50 / 1.969		120 / 4.724					10 - 20 / 0.394 - 0.787				
UF2770	UF-CH-R-D070-L50	1200													
UF2870	UF-CH-M-D070-L50	2000													
UF2970	UF-CH-Z-D070-L50	3000													
UF2070	UF-CH-A-D070-L50	6000													
UF2411	UF-CH-O-D110-L60	600	Ø11 / 0.433	60 / 2.362	Ø12 / 0.472	180 / 7.087	Ø12 / 0.472	115	14000	14 - 20 / 0.551-7.087					
UF2511	UF-CH-B-D110-L60	800													
UF2611	UF-CH-W-D110-L60	1000													

UFIBER


SURFACE BRUSH

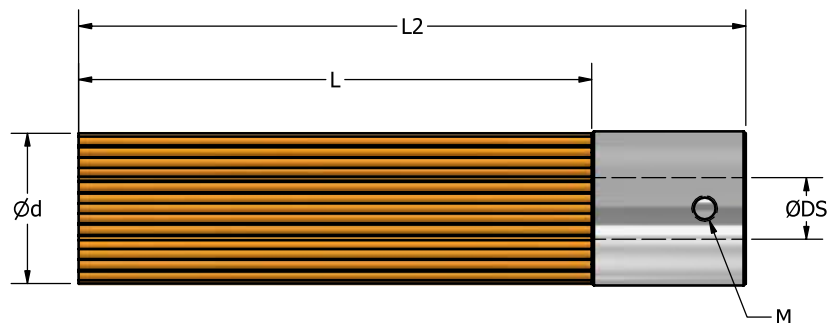

SKU	DESCRIPTION	GRIT SIZE	Ø d mm / inch	L mm / inch	L2 mm / inch	Ø DS mm / inch	SPARE PARTS ⁽¹⁾ (for M)				Wt. gram
							CLAMPING SCREW M x P x L (mm)	SKU	LN KEY L (mm)	SKU	
UF1106	UF-FB-G-D006-L30	150	Ø6 / 0.236	30 / 1.181	42.5 / 1.673	N/A	N/A	N/A	N/A	N/A	3
UF1206	UF-FB-P-D006-L30	200									
UF1306	UF-FB-V-D006-L30	400									
UF1406	UF-FB-O-D006-L30	600									
UF1506	UF-FB-B-D006-L30	800									
UF1606	UF-FB-W-D006-L30	1000									
UF1706	UF-FB-R-D006-L30	1200									
UF1806	UF-FB-M-D006-L30	2000									
UF1906	UF-FB-Z-D006-L30	3000									
UF1006	UF-FB-A-D006-L30	6000									
UF1115	UF-FB-G-D015-L50	150	Ø15 / 0.590	50 / 1.969	65 / 2.560	Ø6 / 0.236	M3 x 0.5 x 4	UF0019	1.5	DH0005	7
UF1215	UF-FB-P-D015-L50	200									
UF1315	UF-FB-V-D015-L50	400									
UF1415	UF-FB-O-D015-L50	600									
UF1515	UF-FB-B-D015-L50	800									
UF1615	UF-FB-W-D015-L50	1000									
UF1715	UF-FB-R-D015-L50	1200									
UF1815	UF-FB-M-D015-L50	2000									
UF1915	UF-FB-Z-D015-L50	3000									
UF1015	UF-FB-A-D015-L50	6000									
UF1125	UF-FB-G-D025-L75	150	Ø25 / 0.984	75 / 2.952	100 / 3.937	Ø9 / 0.354	M4 x 0.7 x 8	UF0018	2	UF0020	21
UF1225	UF-FB-P-D025-L75	200									
UF1325	UF-FB-V-D025-L75	400									
UF1425	UF-FB-O-D025-L75	600									
UF1525	UF-FB-B-D025-L75	800									
UF1625	UF-FB-W-D025-L75	1000									
UF1725	UF-FB-R-D025-L75	1200									
UF1825	UF-FB-M-D025-L75	2000									
UF1925	UF-FB-Z-D025-L75	3000									
UF1025	UF-FB-A-D025-L75	6000									
UF1140	UF-FB-G-D040-L75	150	Ø40 / 1.575	75 / 2.952	96 / 3.780	Ø12 / 0.472	M6 x 1.0 x 8	PC0044	3	DB0007	26
UF1240	UF-FB-P-D040-L75	200									
UF1340	UF-FB-V-D040-L75	400									
UF1440	UF-FB-O-D040-L75	600									
UF1540	UF-FB-B-D040-L75	800									
UF1640	UF-FB-W-D040-L75	1000									
UF1740	UF-FB-R-D040-L75	1200									
UF1840	UF-FB-M-D040-L75	2000									
UF1940	UF-FB-Z-D040-L75	3000									
UF1040	UF-FB-A-D040-L75	6000									


UFIBER

SURFACE BRUSH

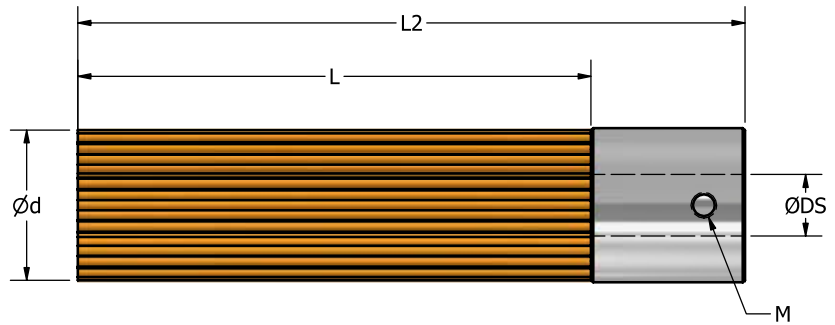

SKU	DESCRIPTION	GRIT SIZE	Ø d mm / inch	L mm / inch	L2 mm / inch	Ø DS mm / inch	SPARE PARTS ⁽¹⁾ (for M)				Wt. gram
							CLAMPING SCREW M x P x L (mm)	SKU	LN KEY L (mm)	SKU	
UF1160	UF-FB-G-D060-L75	150	Ø60 / 2.362	75 / 2.952	96 / 3.780	Ø13 / 0.512	M6 x 1.0 x 20	UF0016	3	DB0007	70
UF1260	UF-FB-P-D060-L75	200									
UF1360	UF-FB-V-D060-L75	400									
UF1460	UF-FB-O-D060-L75	600									
UF1560	UF-FB-B-D060-L75	800									
UF1660	UF-FB-W-D060-L75	1000									
UF1760	UF-FB-R-D060-L75	1200									
UF1860	UF-FB-M-D060-L75	2000									
UF1960	UF-FB-Z-D060-L75	3000									
UF1060	UF-FB-A-D060-L75	6000									
UF1100	UF-FB-G-D100-L75	150	Ø100 / 3.937	75 / 2.952	97 / 3.820	Ø16 / 0.630	M6 x 1.0 x 25	UF0015	3	DB0007	140
UF1200	UF-FB-P-D100-L75	200									
UF1300	UF-FB-V-D100-L75	400									
UF1400	UF-FB-O-D100-L75	600									
UF1500	UF-FB-B-D100-L75	800									
UF1600	UF-FB-W-D100-L75	1000									
UF1700	UF-FB-R-D100-L75	1200									
UF1800	UF-FB-M-D100-L75	2000									
UF1900	UF-FB-Z-D100-L75	3000									
UF1000	UF-FB-A-D100-L75	6000									

(1) The surface brush comes with 2 set-screws for mounting a shaft.
For more details, see "Versatile Surface Brush for Efficient
Cross-Hole Burr Removal" page 14.

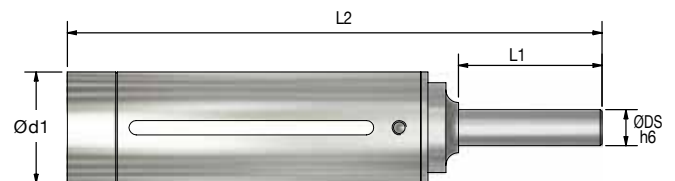


SURFACE BRUSH SLEEVE

SKU	DESCRIPTION	SUITABLE FOR SURFACE BRUSH	Ø d1 (external) mm / inch	L1 mm / inch	L2 mm / inch	Ø DS mm / inch	Wt. gram	SPARE PARTS (for M)			
								CLAMPING SCREW MxPxL (mm)	SKU	LN KEY L (mm)	SKU
UF5506	UF-FS-6-C06-L70	Ø 6/0.236	Ø 10/0.394	30/1.181	71/2.795	Ø 6/0.236	30	M3 x 0.5 x 4	UF0010	2.5	UF0021
UF5515	UF-FS-15-C06-L90	Ø 15/0.590	Ø 18.5/0.728	30/1.181	92/3.622	Ø 6/0.236	40	M3 x 0.5 x 6	UF0011	2	UF0020
UF5525	UF-FS-25-C10-L140	Ø 25/0.984	Ø 30/1.181	30/1.181	149/5.866	Ø 10/0.394	160	M4 x 0.7 x 10	UF0012	2.5	UF0021
UF5540	UF-FS-40-C12-L140	Ø 40/1.575	Ø 45/1.772	30/1.181	135/5.315	Ø 12/0.472	200	M6 x 1.0 x 10	UF0013	4	UF0022
UF5560	UF-FS-60-C12-L145	Ø 60/2.362	Ø 67/2.638	40/1.575	145/5.708	Ø 12/0.472	320	M6 x 1.0 x 10	UF0013	4	UF0022
UF5500	UF-FS-100-C16-L155	Ø 100/3.937	Ø 110/4.330	40/1.575	155/6.102	Ø 16/0.630	670	M8 x 1.25 x 16	UF0014	5	UF0023

UFIBER

SURFACE BRUSH SHANKS

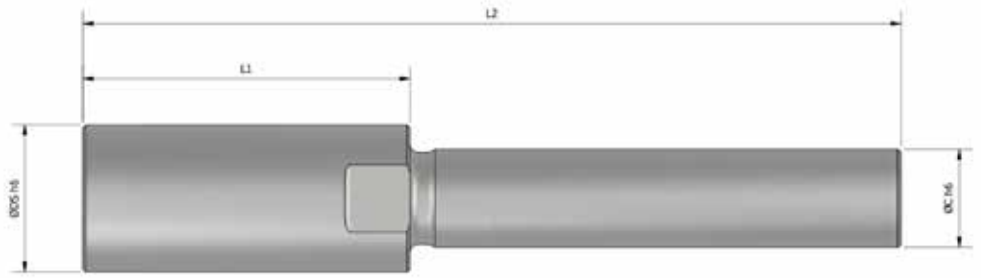


SUITABLE FOR SURFACE BRUSH	SKU	DESCRIPTION	Ø DS ⁽¹⁾ mm/ inch	L mm / inch	L2 mm / inch	Ø C ⁽¹⁾ mm inch
Ø15 mm / 0.590 "	UF5001	UF-S-L045-DS06-C06	Ø6 mm / 0.236 "	30 mm / 1.181 "	45 mm / 1.771 "	6 mm / 0.236 "
Ø25 mm / 0.984 "	UF5002	UF-S-L050-DS09-C06	Ø9 mm / 0.354 "		50 mm / 1.968 "	6 mm / 0.236 "
	UF5003	UF-S-L050-DS09-C10			50 mm / 1.968 "	10 mm / 0.394 "
	UF5007	UF-S-L120-DS09-C10			120 mm / 4.724 "	10 mm / 0.394 "
Ø40 mm / 1.575 "	UF5004	UF-S-L050-DS12-C12	Ø12 mm / 0.472 "		50 mm / 1.968 "	12 mm / 0.472 "
	UF5008	UF-S-L120-DS12-C12			120 mm / 4.724 "	12 mm / 0.472 "
Ø60 mm / 2.362 "	UF5005	UF-S-L050-DS13-C12	Ø13 mm / 0.512 "		50 mm / 1.968 "	12 mm / 0.472 "
Ø100 mm / 3.937"	UF5006	UF-S-L050-DS16-C16	Ø16 mm / 0.630"		50 mm / 1.968 "	16 mm / 0.630 "

(1) Surface brush connection (without sleeve)

(2) Chuck connection (machine side)

UFIBER

SURFACE BRUSH SPEEDS AND FEEDS

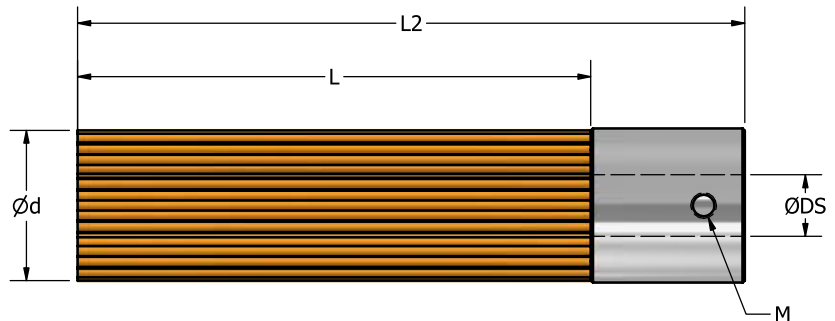


SUITABLE FOR SURFACE BRUSH mm / inch	ØDS mm / inch	L mm / inch	L2 mm / inch	DEPTH OF CUT (DOC)			REC. RPM	FEED (max.) mm / min. inch / min.	BRUSH PROJECTION ⁽¹⁾ (max.) mm / inch
				POLISHING mm / inch	DEBURRING mm / inch	MAX. mm / inch			
Ø 6 / 0.236	NA	30 / 1.181	42.5 / 1.673	0.2 / 0.008	0.5 / 0.02	1.2 / 0.05	9000-12000	2000 / 79	10 / 0.394
Ø 15 / 0.590	Ø 6 / 0.236	50 / 1.969	65 / 2.559				5700-7200		
Ø 25 / 0.984	Ø 9 / 0.354	75 / 2.952	100 / 3.937				5000-6000		
Ø 40 / 1.575	Ø 12 / 0.472	75 / 2.952	96 / 3.780				2700-3600		
Ø 60 / 2.362	Ø 13 / 0.512	75 / 2.952	96 / 3.780				1800-2400		
Ø 100 / 3.937	Ø 16 / 0.630	75 / 2.952	97 / 3.820				1000-1400		

(1) When mounted with corresponding sleeve

UFIBER


END BRUSH - FLAT

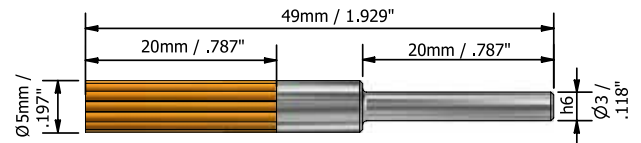

FLAT END BRUSH				
SKU	DESCRIPTION	GRIT SIZE	Wt. gram	MAX. RPM ⁽¹⁾
UF4150	UF-EB-G-D5-L20	150	3	12000
UF4250	UF-EB-P-D5-L20	200		
UF4350	UF-EB-V-D5-L20	400		
UF4450	UF-EB-O-D5-L20	600		
UF4550	UF-EB-B-D5-L20	800		
UF4650	UF-EB-W-D5-L20	1000		
UF4750	UF-EB-R-D5-L20	1200		
UF4850	UF-EB-M-D5-L20	2000		
UF4950	UF-EB-Z-D5-L20	3000		
UF4050	UF-EB-A-D5-L20	6000		

⁽¹⁾The brush bristles will maintain their original shape at maximum RPM.

END BRUSH - 90° ANGLED

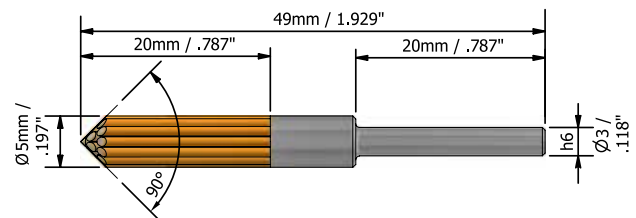

90° ANGLED END BRUSH				
SKU	DESCRIPTION	GRIT SIZE	Wt. gram	MAX. RPM ⁽¹⁾
UF6150	UF-EB45-G-D5-L20	150	3	12000
UF6250	UF-EB45-P-D5-L20	200		
UF6350	UF-EB45-V-D5-L20	400		
UF6450	UF-EB45-O-D5-L20	600		
UF6550	UF-EB45-B-D5-L20	800		
UF6650	UF-EB45-W-D5-L20	1000		
UF6750	UF-EB45-R-D5-L20	1200		
UF6850	UF-EB45-M-D5-L20	2000		
UF6950	UF-EB45-Z-D5-L20	3000		
UF6050	UF-EB45-A-D5-L20	6000		


⁽¹⁾The brush bristles will maintain their original shape at maximum RPM.

UFIBER

POINT BRUSH

Dimensions for 1.0 - 2.0mm (0.039 - 0.079")

SKU	DESCRIPTION	GRIT SIZE	Ø d mm / inch	Wt. gram	MAX. RPM ⁽¹⁾
UF3110	UF-PB-G-D1-L20	150	Ø1.0 / 0.039	2	12000
UF3210	UF-PB-P-D1-L20	200			
UF3310	UF-PB-V-D1-L20	400			
UF3410	UF-PB-O-D1-L20	600			
UF3510	UF-PB-B-D1-L20	800			
UF3610	UF-PB-W-D1-L20	1000			
UF3710	UF-PB-R-D1-L20	1200			
UF3810	UF-PB-M-D1-L20	2000			
UF3910	UF-PB-Z-D1-L20	3000			
UF3010	UF-PB-A-D1-L20	6000			
UF3115	UF-PB-G-D1.5-L20	150	Ø1.5 / 0.059	2	12000
UF3215	UF-PB-P-D1.5-L20	200			
UF3315	UF-PB-V-D1.5-L20	400			
UF3415	UF-PB-O-D1.5-L20	600			
UF3515	UF-PB-B-D1.5-L20	800			
UF3615	UF-PB-W-D1.5-L20	1000			
UF3715	UF-PB-R-D1.5-L20	1200			
UF3815	UF-PB-M-D1.5-L20	2000			
UF3915	UF-PB-Z-D1.5-L20	3000			
UF3015	UF-PB-A-D1.5-L20	6000			
UF3120	UF-PB-G-D2-L20	150	Ø2.0 / 0.079	2	12000
UF3220	UF-PB-P-D2-L20	200			
UF3320	UF-PB-V-D2-L20	400			
UF3420	UF-PB-O-D2-L20	600			
UF3520	UF-PB-B-D2-L20	800			
UF3620	UF-PB-W-D2-L20	1000			
UF3720	UF-PB-R-D2-L20	1200			
UF3820	UF-PB-M-D2-L20	2000			
UF3920	UF-PB-Z-D2-L20	3000			
UF3020	UF-PB-A-D2-L20	6000			

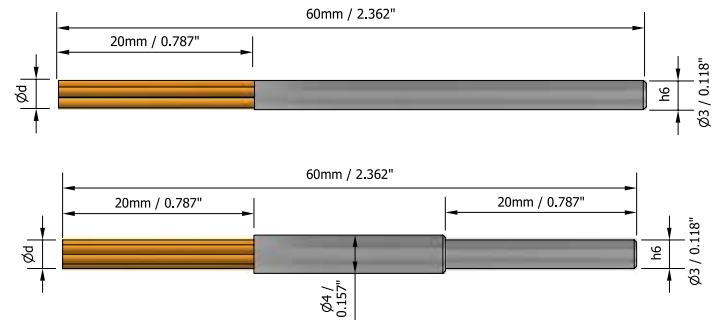

Dimensions only for 2.5 - 3mm (0.098 - 0.118")

SKU	DESCRIPTION	GRIT SIZE	Ø d mm / inch	Wt. gram	MAX. RPM ⁽¹⁾
UF3125	UF-PB-G-D2.5-L20	150	Ø2.5 / 0.098	3	12000
UF3225	UF-PB-P-D2.5-L20	200			
UF3325	UF-PB-V-D2.5-L20	400			
UF3425	UF-PB-O-D2.5-L20	600			
UF3525	UF-PB-B-D2.5-L20	800			
UF3625	UF-PB-W-D2.5-L20	1000			
UF3725	UF-PB-R-D2.5-L20	1200			
UF3825	UF-PB-M-D2.5-L20	2000			
UF3925	UF-PB-Z-D2.5-L20	3000			
UF3025	UF-PB-A-D2.5-L20	6000			
UF3130	UF-PB-G-D3-L20	150	Ø3.0 / 0.118	3	12000
UF3230	UF-PB-P-D3-L20	200			
UF3330	UF-PB-V-D3-L20	400			
UF3430	UF-PB-O-D3-L20	600			
UF3530	UF-PB-B-D3-L20	800			
UF3630	UF-PB-W-D3-L20	1000			
UF3730	UF-PB-R-D3-L20	1200			
UF3830	UF-PB-M-D3-L20	2000			
UF3930	UF-PB-Z-D3-L20	3000			
UF3030	UF-PB-A-D3-L20	6000			

⁽¹⁾The brush bristles will maintain their original shape at maximum RPM.




For additional details about our UFIBER products, including the complete product range and technical guidelines, please visit our website at: <https://nogamt.com/ufiber-ceramic-brush/>

UFIBER TOOLS

CERAMIC DIAMOND STONES

PRECISION FINISHING FOR ULTRA-HARD MATERIALS

Achieve consistent surface quality on the most challenging materials with **UFIBER** Ceramic Diamond Stones. Combining diamond abrasives with a nano-engineered ceramic fiber structure, these stones deliver controlled cutting, long tool life, and superior surface finish.

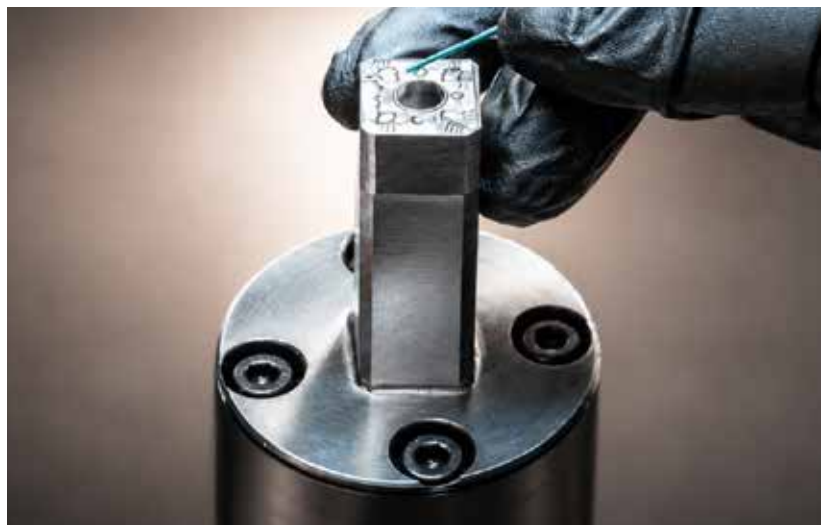

FEATURES

- Full-surface cutting capability – works beyond edges and tips.
- Self-sharpening structure – continuous exposure of fresh abrasives.
- Clog-resistant design – prevents loading and maintains performance.
- Higher mechanical strength compared to conventional resin-bonded abrasive tools.
- Multi-directional cutting - effective across the full contact surface and in multiple directions.
- Suitable for pneumatic tools at controlled high speeds.
- Can be tailored to custom shapes.

APPLICATIONS

- Tungsten carbide
- Hardened steels
- Ceramics
- Glass
- EDM-processed surfaces
- Precision components

GRIT & COLOR IDENTIFICATION GUIDE




UFIBER TOOLS



DIAMOND STONE POINT-TYPE

Dimensions only for 1.0 - 2.0 mm (0.039 - 0.079")

SKU	DESCRIPTION	STONE COLOR	GRIT SIZE	Ø d mm / inch	Wt. gram	MAX. RPM
UF9110	UF-DS-B-D1-L20	BLACK	200	Ø1.0mm/ 0.039"	2	60,000
UF9210	UF-DS-S-D1-L20	SILVER	400			
UF9310	UF-DS-F-D1-L20	FOREST GREEN	600			
UF9410	UF-DS-G-D1-L20	GREEN	800			
UF9115	UF-DS-B-D1.5-L20	BLACK	200	Ø1.5mm / 0.059"	2	60,000
UF9215	UF-DS-S-D1.5-L20	SILVER	400			
UF9315	UF-DS-F-D1.5-L20	FOREST GREEN	600			
UF9415	UF-DS-G-D1.5-L20	GREEN	800			
UF9120	UF-DS-B-D2-L20	BLACK	200	Ø2.0mm / 0.079"	2	60,000
UF9220	UF-DS-S-D2-L20	SILVER	400			
UF9321	UF-DS-F-D2-L20	FOREST GREEN	600			
UF9421	UF-DS-G-D2-L20	GREEN	800			

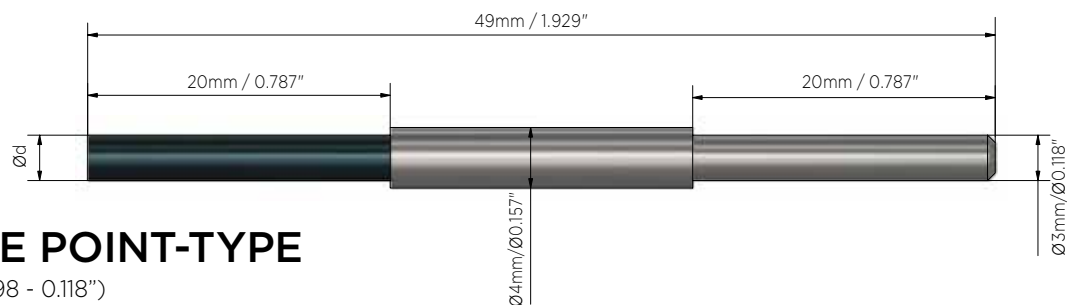

DIAMOND STONE POINT-TYPE

Dimensions for 2.5 - 3.0mm (0.098 - 0.118")

SKU	DESCRIPTION	STONE COLOR	GRIT SIZE	Ø d mm / inch	Wt. gram	MAX. RPM
UF9125	UF-DS-B-D2.5-L20	BLACK	200	Ø2.5 mm / 0.098"	3	60,000
UF9225	UF-DS-S-D2.5-L20	SILVER	400			
UF9325	UF-DS-F-D2.5-L20	FOREST GREEN	600			
UF9425	UF-DS-G-D2.5-L20	GREEN	800			
UF9130	UF-DS-B-D3-L20	BLACK	200	Ø3.0 mm / 0.118"	3	60,000
UF9230	UF-DS-S-D3-L20	SILVER	400			
UF9330	UF-DS-F-D3-L20	FOREST GREEN	600			
UF9430	UF-DS-G-D3-L20	GREEN	800			

Controlled Finishing. Superior Results.

UFIBER TOOLS

RADIAL CERAMIC FIBER DISCS

PRECISION RADIAL DEBURRING, GRINDING & POLISHING

The **UFIBER** Radial Ceramic Fiber Disc is an ultra-thin radial abrasive tool designed for precision deburring, grinding, edge finishing and polishing. Its outer circumference provides controlled radial cutting action, while the 0.8 mm profile enables access to grooves, ribs, side walls, slots and other narrow or difficult-to-access features.



FEATURES

- **Radial Cutting Action:** Controlled finishing using the outer edge of the disc.
- **Ultra-Thin 0.8 mm Disc:** Reaches narrow grooves and confined areas.
- **Precision Deburring:** Controlled burr removal and edge refinement.
- **Grinding & Polishing:** From coarse removal to fine polishing.
- **Portable Operation:** Compatible with UFIBER E-Pack UF9999.
- **Automation Ready:** Suitable for CNC and robotic applications.


APPLICATIONS

- Radial Deburring & Edge Finishing
- Narrow Grooves & Slots
- Rib Bottoms & Side Walls
- Internal & External Profiles
- Local Grinding & Polishing
- CNC & Robotic Finishing

GRIT & COLOR IDENTIFICATION GUIDE

COARSE ◀◀				FINE ▶▶	
#150 GREEN	#200 PINK	#400 VIOLET	#600 ORANGE	#800 BLUE	#1000 WHITE
					
Suitable for Heavy Burr removal	Suitable for Coarse Finishing	Suitable for Coarse Finishing	Suitable for Fine Finishing	Suitable for Fine Polishing	Suitable for Ultra Fine Polishing

UFIBER TOOLS

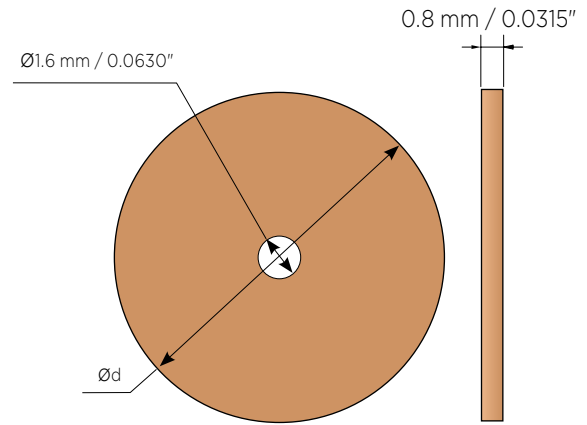


RADIAL CERAMIC FIBER DISCS

Operating Note: Use with a compatible electric rotary tool or spindle. Also compatible with the UFIBER Portable E-Pack UF9999. Always operate within the maximum RPM specified for the selected disc.

SKU	DESCRIPTION	DISC COLOR	GRIT SIZE	Ø d mm / inch	MAX. RPM
UF7113	UF-GD-G-D013-L008	GREEN	150	Ø13mm / 0.512"	9000
UF7213	UF-GD-P-D013-L008	PINK	200		
UF7313	UF-GD-V-D013-L008	VIOLET	400		
UF7413	UF-GD-O-D013-L008	ORANGE	600		
UF7513	UF-GD-B-D013-L008	BLUE	800		
UF7613	UF-GD-W-D013-L008	WHITE	1000		
UF7119	UF-GD-G-D019-L008	GREEN	150	Ø19mm / 0.748"	9000
UF7219	UF-GD-P-D019-L008	PINK	200		
UF7319	UF-GD-V-D019-L008	VIOLET	400		
UF7419	UF-GD-O-D019-L008	ORANGE	600		
UF7519	UF-GD-B-D019-L008	BLUE	800		
UF7619	UF-GD-W-D019-L008	WHITE	1000		
UF7122	UF-GD-G-D022-L008	GREEN	150	Ø22mm / 0.866"	9000
UF7222	UF-GD-P-D022-L008	PINK	200		
UF7322	UF-GD-V-D022-L008	VIOLET	400		
UF7422	UF-GD-O-D022-L008	ORANGE	600		
UF7522	UF-GD-B-D022-L008	BLUE	800		
UF7622	UF-GD-W-D022-L008	WHITE	1000		
UF7125	UF-GD-G-D025-L008	GREEN	150	Ø25mm / 0.984"	9000
UF7225	UF-GD-P-D025-L008	PINK	200		
UF7325	UF-GD-V-D025-L008	VIOLET	400		
UF7425	UF-GD-O-D025-L008	ORANGE	600		
UF7525	UF-GD-B-D025-L008	BLUE	800		
UF7625	UF-GD-W-D025-L008	WHITE	1000		
UF7130	UF-GD-G-D030-L008	GREEN	150	Ø30mm / 1.181"	9000
UF7230	UF-GD-P-D030-L008	PINK	200		
UF7330	UF-GD-V-D030-L008	VIOLET	400		
UF7430	UF-GD-O-D030-L008	ORANGE	600		
UF7530	UF-GD-B-D030-L008	BLUE	800		
UF7630	UF-GD-W-D030-L008	WHITE	1000		

DISC CLAMPING SHANKS

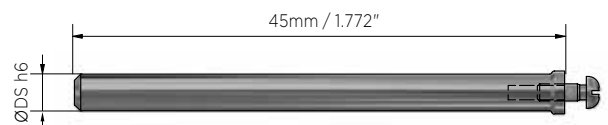

SKU	DESCRIPTION	Ø d mm / inch	SPARE PARTS	
			CLAMPING SCREW	WASHER
UF7023	UF-DA-016-C023-L45	Ø2.35mm / 0.093"	M1.6 x 0.35 mm	O.D. Ø5.0 x I.D. Ø1.61 x H 0.48 mm
UF7030	UF-DA-016-C030-L45	Ø3.0mm / 0.118"		O.D. Ø0.197" x I.D. Ø0.063" x H 0.019"

ULTIMATE UFIBER! PORTABLE E-PACK

UF9999

RPM DISPLAY POWER PACK & HANDPIECE

FOR POWER, PRECISION & FREEDOM

NOGA MT's **UFIBER** portable E-Pack with RPM display and ergonomic handpiece delivers the perfect balance of power, control and portability. Compatible with **UFIBER** End and Point Brushes, Radial Ceramic Fiber Discs and Ceramic Diamond Stones, it provides a versatile solution for precision deburring, grinding, edge finishing and polishing wherever flexibility and control are required.

MAIN BENEFITS

SLIM, POWERFUL POWER PACK WITH ERGONOMIC HANDPIECE DESIGN

- Portable, Compact & Lightweight.
- Well-balanced ergonomic handpiece for long-term use.
- Easy to use controls with RPM Display.
- Fully wireless. Fast charging. Long battery life.
- Can be operated whilst charging.
- Forward & Reverse Rotation.
- Low Vibration and Low Noise.
- High Speed - 30,000 RPM
- Stable Torque at Low RPM
- Overload Protection System
- Smooth & Efficient due to BLDC motor.

INDUSTRIAL APPLICATIONS

- | | |
|--------------|---------------|
| ■ Aerospace | ■ Medical |
| ■ Automotive | ■ Electronics |



PACK CONTAINS:

- Power Pack with Handpiece
- Sturdy Plastic Holder with Belt Clips for Handpiece & Power Pack
- Power Adaptor
- User Manual

UFIBER

POWER PACK & HANDPIECE

SPECIFICATIONS FOR POWER PACK

POWER PACK TECHNICAL SPECIFICATIONS	
DESCRIPTION	SPECIFICATION
RPM	Max 30,000 RPM
INPUT	100 - 240V ~ 50/60Hz
OUTPUT	DC 12.6V / 2A
DIMENSION	65 x 129 x 36 mm
WEIGHT	255 g
BATTERY CHARGING TIME	2 hours
WORKING TIME	10 hours

PORTABILITY



Integrated Belt Clip: Keeps your device safe while guaranteeing total hands-free mobility.

SPECIFICATIONS FOR HANDPIECE

HANDPIECE TECHNICAL SPECIFICATIONS	
DESCRIPTION	SPECIFICATION
RPM	Max 30,000 RPM
TORQUE	Max. 3.0 Ncm
DIMENSION	128.2 x 19.8 mm
WEIGHT	113 g (without cord)

Compatible with all **UFIBER** End and Point Brushes, Radial Ceramic Fiber Discs and Ceramic Diamond Stones. **Note:** Always operate within the maximum RPM specified for the selected **UFIBER** tool.



UFIBER TOOLS

FLOATING DAMPERS FOR BRUSHES

The NOGA MT Floating Damper is engineered for reliable deburring and surface finishing, compensating for surface irregularities and brush wear to maintain stable tool contact and consistent results. Its integrated spring mechanism delivers controlled, constant pressure, ensuring uniform performance in CNC and automated applications.



KEY ADVANTAGES

- Maintains uniform cutting conditions throughout the process.
- Minimizes the need for precise depth adjustments.
- Improves consistency of edge finishing.
- Reduces tool wear and extends service life.
- Eliminates programming adjustments to compensate for bristle wear.

TYPICAL APPLICATIONS

- Surface finishing using **UFIBER** brushes.
- Automated deburring and polishing on CNC machines.
- Robotic deburring and polishing systems.
- Repeatable finishing where stable brush contact is required.



UFIBER TOOLS

FLOATING DAMPERS FOR BRUSHES

TECHNICAL SPECIFICATIONS

SERIES UF-FD...BT...		
SKU	DESCRIPTION	Ø D mm / inch
UF8853	UF-FD-DS06-BT30	6 mm / 0.236"
UF8854	UF-FD-DS10-BT30	10 mm / 0.394"
UF8855	UF-FD-DS12-BT30	12 mm / 0.472"
UF8856	UF-FD-DS16-BT30	16 mm / 0.630"
UF8857	UF-FD-DS06-BT40	6 mm / 0.236"
UF8858	UF-FD-DS10-BT40	10 mm / 0.394"
UF8859	UF-FD-DS12-BT40	12 mm / 0.472"
UF8860	UF-FD-DS16-BT40	16 mm / 0.630"

SERIES UF-FD-DS....(END TYPE)			
SKU	DESCRIPTION	Ø C mm / inch	Ø DS mm / inch
UF8851	UF-FD-DS06-C06	6 mm / 0.236"	6 mm / 0.236"
UF8852	UF-FD-DS10-C10	10 mm / 0.394"	10 mm / 0.394"

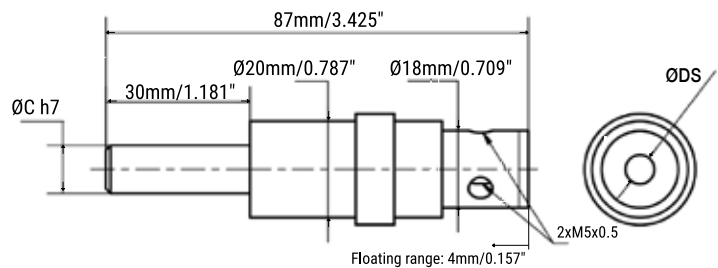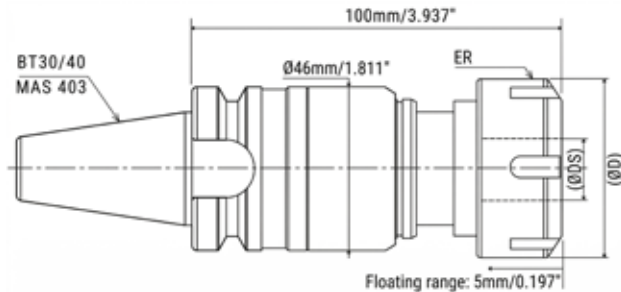

PARAMETER	VALUE
Interface	MAS 403-BT30 / BT 40
Max. Speed	6,000 rpm
Tool Shank Capacity ØDS	Ø6/Ø10/Ø12/Ø16 mm(0.236/0.394/0.472/0.630")
ER Collet ØD	ER25UM for BT30 / ØD=42mm (1.653")
Ultra Precision < 5µm Runout	ER25UM for BT40 / ØD=50mm (1.968")
Floating Range	5.0 mm (0.197")
Spring Pressure	Approx. 50N

PARAMETER	VALUE
Interface	END TYPE
Max. Speed	12,000 rpm
Balance	High-Speed Balance
Tool Shank Capacity	Ø6 (0.236")
Tool Shank Diameter ØC	UF8851 Ø6 (0.236") / UF8852 Ø10 (0.394")
Floating Range	4.0 mm (0.157")
Spring Pressure	Approx. 20N

SERIES UF-FD...BT.... Spare Parts

- BT30 Pull Stud M 12 x 1.75
- BT40 Pull Stud M 16 x 2

SERIES UF-FD-DS...(End Type).... Spare Parts

- UF0022 Socket Allen Key 4 mm
- UF0024 Clamping Screws - 2 X M5 x 5 x 0.5

ULTIMATE UBACK! TOOLS

PRECISION BACK COUNTER SOLUTIONS



The Ultimate Back line brings together the innovative **UX** Tool-holders and **USPOT** & **UCHAMF** inserts to redefine machining precision. Featuring a patented hydraulic mechanism that ingeniously uses the machine's coolant system, this system delivers exceptional control over insert movement.

THE RESULT - Unparalleled accuracy, repeatability, and streamlined operations for back counterboring, back countersinking, and back spotfacing tasks.

ULTIMATE UBACK! TOOLS

PRECISION BACK COUNTER SOLUTIONS

NOGA MT's Ultimate Back series combines innovative **UX** Tool-holders with **USPOT** & **UCHAMF** inserts to deliver unparalleled precision in back spotfacing, back counterboring, and back countersinking operations. This system utilizes a patented hydraulic mechanism operated by the CNC machine's coolant, ensuring exceptional control over insert movement for accurate and repeatable machining which optimizes machining processes and reduces cycle times. Its advanced engineering ensures flawless results, making it the ultimate choice for professionals seeking precision and efficiency in their machining operations.

UBACK


Tool Holders Support Pilot Hole Diameters $\varnothing d$
Ranging from $\varnothing 8.0$ - 25.0 mm (0.315 - 0.984 "")

USPOT Inserts



Through-hole Back Counterboring or Spotfacing

Spotface Diameters from $\varnothing 8.5$ - 57.5 mm (0.335 - 2.264 "")
Semi-Standard or Tailor-made Inserts




UCHAMF Inserts



Through-hole Back Chamfering

Countersink Diameters from $\varnothing 8.5$ - 47.0 mm (0.335 - 1.850 "")
Available with Standard 82° and 90° Countersink Inserts



ULTIMATE UBACK! TOOLS

UBACK MAIN BENEFITS

OPERATIONAL

- Single-pass operation without workpiece rotation.
- Superior chip management.
- Streamlined insert replacement.
- Protected pilot hole integrity.

PRODUCTION

- **CAM Ready:** The UBACK tool-holders are included in SolidCAM libraries, providing quick access to specifications and applications for seamless integration. This simplifies programming, reduces cycle times and enhances overall efficiency.
- Automation-compatible design for optimizing efficiency.
- Cost-effective for all production volumes.

INDUSTRIAL APPLICATIONS

- Aerospace
- Automotive
- Medical
- Electronics




UBACK TOOLS


MAIN FEATURES

Our patented hydraulic mechanism harnesses your machine's coolant system to deliver precise control over insert movement, ensuring exceptional accuracy and repeatability in:

BACK COUNTERBORING AND SPOTFACING



BACK COUNTERSINKING AND CHAMFERING



UBACK TOOL-HOLDERS FEATURES


- Innovative hydraulic coolant-powered precision control mechanism for controlling the insert retraction into the tool-holder body.
- Minimum pressure requirement: 6 bar / 90 PSI.
- Compatible to work with air, emulsion or MQL.
- Diameter range: $\varnothing 8$ mm to $\varnothing 25$ mm (0.315 - 0.984") with increments of 1 mm (0.039").
- Superior chip-control with coolant directed to the cutting edge.
- Compatible for both USPOT or UCHAMF inserts.

USPOT & UCHAMF INSERTS FEATURES

- High accuracy and repairability due to advanced production process.
- The USPOT inserts can reach up to 2.3 from the pilot-hole diameter.
- Specialized designs for specific machining operations.
- Easy single-screw replacement.
- Various coating options available.
- Customizable chip-formers and corner radii.
- Protective pilot hole design preventing scratches.

UBACK TOOLS

HOW DOES UBACK WORK?

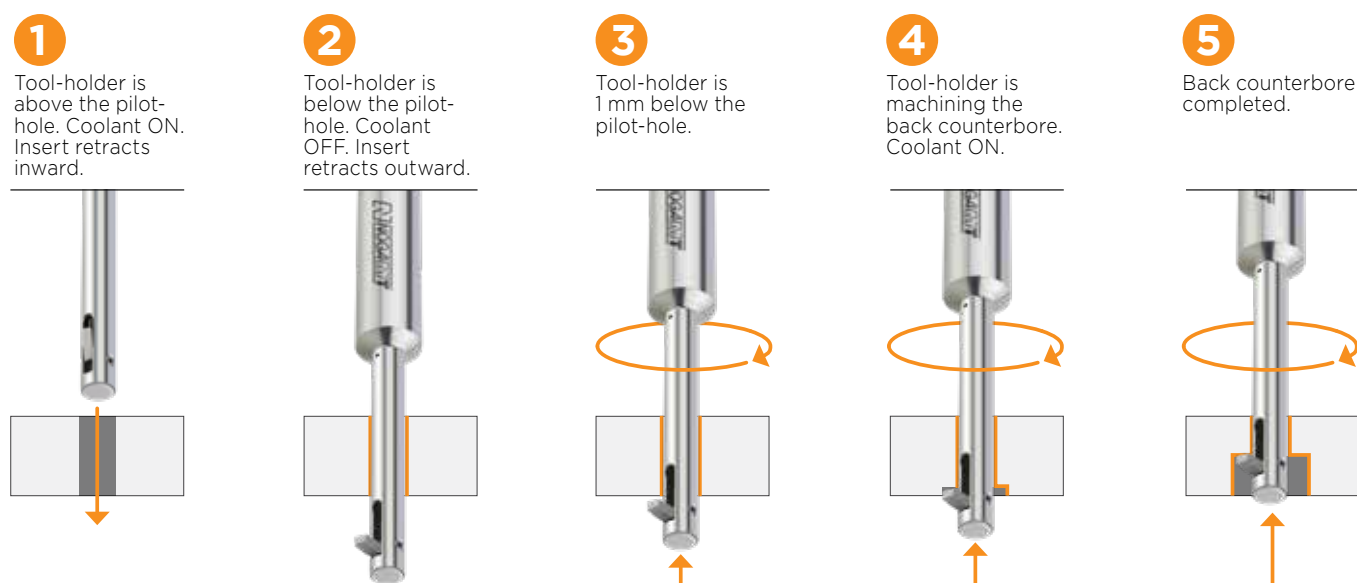

COMPARATIVE ANALYSIS

FEATURE	UBACK by NOGA MT	COMPETITOR "X"
TECHNOLOGY	Hydraulic mechanism for precise control	Mechanical and hydraulic mechanism
APPLICATIONS	Back spotfacing, counterboring, countersinking, including interrupted cut applications	Back spotfacing, counterboring, with limited interrupted cut applications
MATERIAL SUITABILITY	Compatible with all materials; offers advanced coatings and chip-formers (e.g. hardened steel, composites).	Limited materials; fewer coatings and chip-formers
AUTOMATION READINESS	Fully compatible with CNC and robotic systems	Limited CNC integration
INSERT RETRACTION	Precise hydraulic actuation	Controlled with hydraulic actuation
INSERT EXTENSION	Precise hydraulic actuation	Uses centrifugal force
COOLANT SYSTEM	Same tool-holder works for air, emulsion or MQL	Requires a different tool-holder system
SPEED & EFFICIENCY	Delivers faster cycle times and high repeatability	Standard operational speed
CHIP CONTROL	Advanced chip-formers and optimized coating for better control	Basic chip evacuation system
INSERT REPLACEMENT	Easy replacement with a single screw, no additional tools needed	Requires replacement pins and special mounting devices

VALUE PROPOSITION

The **UBACK** by NOGA MT redefines back machining with its combination of precision engineering and operational efficiency. Its innovative design enhances machining processes, ensuring consistent, high-quality results, while minimizing operational costs and maximizing productivity. This makes it the ideal solution for advanced manufacturing, excelling in precision, speed and material versatility.


UBACK USPOT INSERT

SERIES AND RANGE

The **UBACK** line is divided into series or groups, with each series optimized for a specific pilot-hole range and determined by the type of insert family.


For **USPOT** inserts:

SERIES	Ød PILOT-HOLE RANGE mm / Inch	ØD COUNTERBORE RANGE mm / Inch
B	8.0 -10.0 / 0.315 - 0.394	8.5 -23.0 / 0.335 - 0.906
C	11.0 -13.0 / 0.433 - 0.512	11.5 - 30.0 / 0.453 - 1.181
D	14.0 -16.0 / 0.551 - 0.630	14.5 -37.0 / 0.571 - 1.457
E	17.0 -19.0 / 0.669 - 0.748	17.5 -44.0 / 0.689 - 1.732
F	20.0 -22.0 / 0.787 - 0.866	20.5 -50.5 / 0.807 - 1.988
G	23.0 -25.0 / 0.906 - 0.984	23.5 -57.5 / 0.925 - 2.264

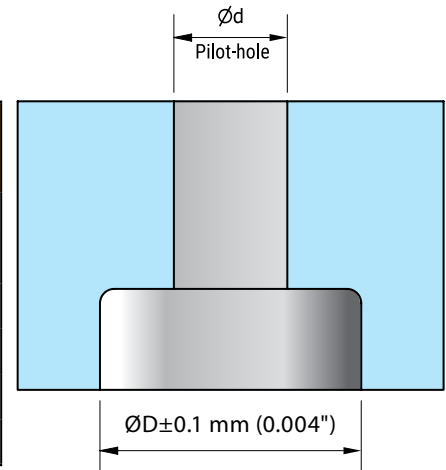

The **USPOT inserts** are offered as semi-standard solutions tailored to meet customer-specific applications. It is mandatory to match the tool-holder series with the corresponding insert series.

■ USPOT INSERTS CODING SYSTEM SPECIFICATIONS AND IDENTIFICATION:

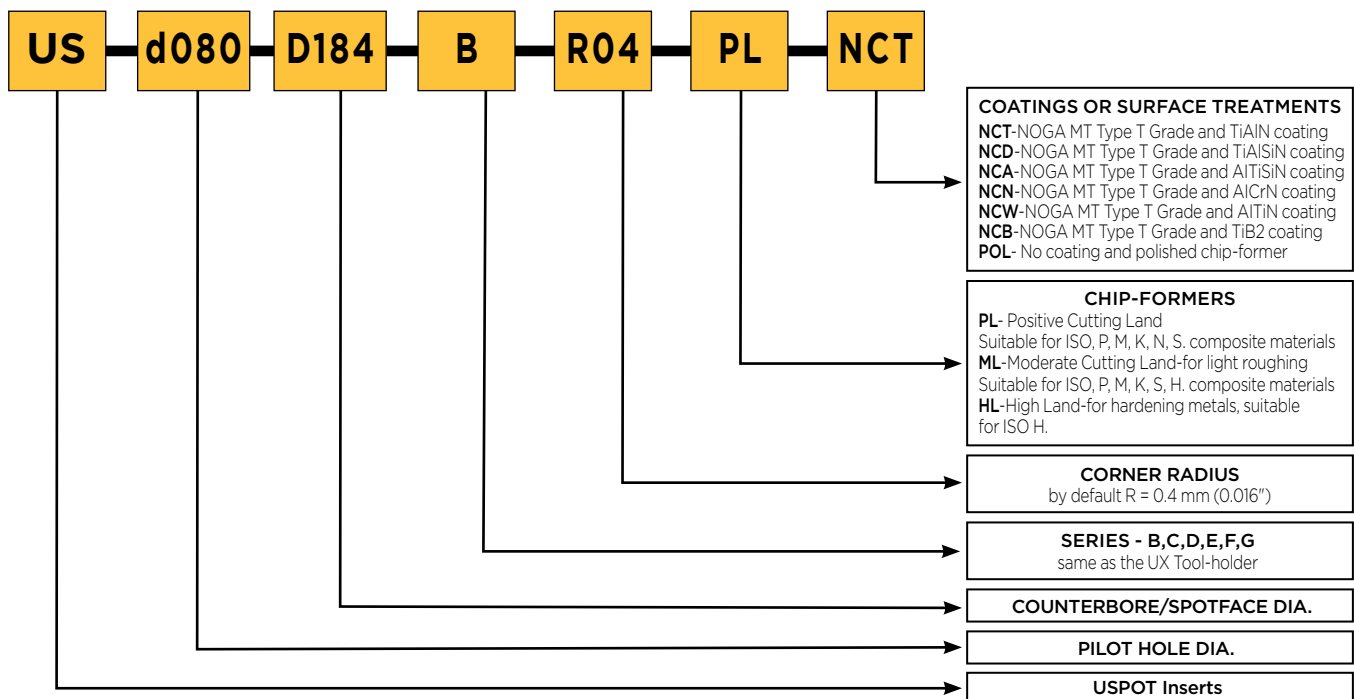


NOTES:

- Coating:** Our top recommendation is the NCT grade, featuring the versatile TiAlN PVD coating. It offers excellent thermal stability, oxidation resistance, and is compatible with a wide range of materials, including mild steels, stainless steel, and Inconel. For additional options, refer to the list of available coatings on page 47.
- Tool-holders and inserts** are sold separately.

UBACK USPOT INSERT

HOW TO ORDER A USPOT INSERT TO MATCH YOUR APPLICATION

The **USPOT** inserts are available only as semi-standard solutions tailored to customer applications.

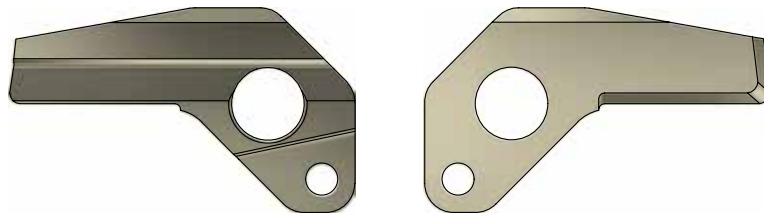

- **CHOOSE THE APPROPRIATE TOOL-HOLDER BASED ON THE PILOT HOLE DIAMETER.**
For instance, if the pilot hole diameter is 8.5 mm, select the **UX2080**, which supports a minimum diameter ($\varnothing_{\text{dmin}}$) of 8 mm.
- **SPECIFY THE REQUIRED PARAMETERS FOR THE USPOT INSERT**, including the pilot-hole diameter, counter-bore or spotface diameter, corner radius, chip-former and coating according to coding system page 35.
- **FILL IN THE RELEVANT DETAILS FOR THE USPOT INSERT** description as outlined in the coding system below.
- **ENSURE COMPATIBILITY BETWEEN THE USPOT INSERT SERIES AND THE CORRESPONDING UX TOOL-HOLDER.** The series of the insert must match the series of the **UX** tool-holder.

USPOT - EXAMPLE FOR ORDERING SEMI-STANDARD INSERT:

Here is an example of coding a semi-standard **USPOT** insert for the application shown below:

1. $\varnothing d = 8.7\text{mm}$ (0.343")
2. $\varnothing D = 17.6\text{mm}$ (0.693")
3. $R = 0.2\text{mm}$ (0.008")
4. **Material:** AISI 4340 / 34CrNiMo6 (1.6582) / SNCM439, tempered to 42 HRC


The recommended tool-holder is **UX2080 / UX-d080-B-C16-H62-L115**

The corresponding insert is **US-d087-D176-B-R02-ML-NCT**


IMPORTANT NOTES:

Ensure that the pilot-hole length (L) is less than or equal to the RFC (Relief For Cutting) $L \leq \text{RFC}$, as specified in the UBACK tool-holders table pages 37-38.

If you need further assistance, please don't hesitate to contact us:
Providing an application drawing or sketch, the raw material specifications, and any other relevant information will help us assist you more effectively.

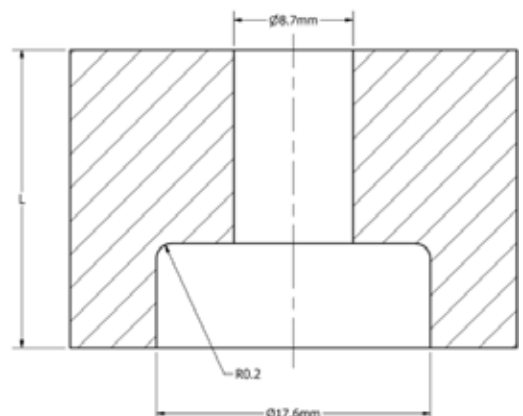

U BACK

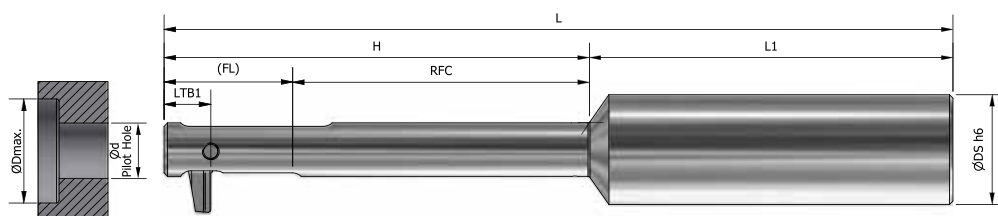

STANDARD TOOL-HOLDERS WITH USPOT INSERTS (mm)

Ød min. PILOT HOLE	SKU TOOL- HOLDER	DESCRIPTION TOOL-HOLDER	ØDS h6	FL ⁽¹⁾	RFC ⁽²⁾	H	L	L1	LTB1 ⁽³⁾ max USPOT	ØD ⁽⁴⁾ max.	PISTON ⁽⁶⁾ PLUG MxPxL(mm)	INSERTING CLAMPING SCREW MxPxL(mm)	SERIES ⁽⁵⁾
8	UX2080	UX-d080-B-C16-H62-L115	16	17	43	62	115	53	7.3	18.5	UX0011/ M5x0.8x6	UX0005/ M2.5x0.35x7B	B
9	UX2090	UX-d090-B-C16-H62-L115	16	17.8	43	62	115	53	7.3	21			B
10	UX2100	UX-d100-B-C16-H62-L115	16	18.8	43	62	115	53	7.3	23			B
11	UX3110	UX-d110-C-C16-H80-L133	16	27	52	80	133	53	12.4	26	UX0011/ M5x0.8x6	UX0006/ M3x0.35x10C	C
12	UX3120	UX-d120-C-C16-H80-L133	16	27.3	52	80	133	53	12.4	28			C
13	UX3130	UX-d130-C-C16-H80-L133	16	28	52	80	133	53	12.4	30			C
14	UX4140	UX-d140-D-C20-H105-L158	20	32.5	72.5	105	158	53	14.0	32.5	UX0012/ M6x1.0x6	UX0007/ M3x0.35x13D	D
15	UX4150	UX-d150-D-C20-H105-L158	20	32.5	72.5	105	158	53	14.0	34.5			D
16	UX4160	UX-d160-D-C20-H105-L158	20	32.5	72.5	105	158	53	14.0	37			D
17	UX5170	UX-d170-E-C20-H115-L170	20	38.5	76.5	115	170	55	16.5	39.5	UX0012/ M6x1.0x6	UX0008/ M3x0.35x16E	E
18	UX5180	UX-d180-E-C20-H115-L170	20	38.5	76.5	115	170	55	16.5	41.5			E
19	UX5190	UX-d190-E-C20-H115-L170	20	38.5	76.5	115	170	55	16.5	44			E
20	UX6200	UX-d200-F-C25-H120-L175	25	43.5	76.5	120	175	55	18.8	46	UX0013/ M8x1.25x6	UX0009/ M4x0.5x19F	F
21	UX6210	UX-d210-F-C25-H120-L175	25	43.5	76.5	120	175	55	18.8	48.5			F
22	UX6220	UX-d220-F-C25-H120-L175	25	43.5	76.5	120	175	55	18.8	50.5			F
23	UX7230	UX-d230-G-C25-H120-L175	25	48	72	120	175	55	21	53	UX0013/ M8x1.25x6	UX0010/ M4x0.5x21G	G
24	UX7240	UX-d240-G-C25-H120-L175	25	48	72	120	175	55	21	55.5			G
25	UX7250	UX-d250-G-C25-H120-L175	25	48	72	120	175	55	21	57.5			G

(1) FL - Folding Length.

(2) RFC - Relief For Cutting.

(3) LTB1 - (Length to bottom) The LTB1 parameter depends on the **USPOT** insert size. The maximum permitted value is specified in the table above.

(4) The achieved tolerance for the counterbore or spotface diameter ØD is ± 0.1 mm (0.004").

(5) The insert series must match the series of the tool-holder.


(6) Piston plug for adapting various coolant systems (refer to page 47).

NOTE Tool-holders and inserts are sold separately.

UX Tool-holder Spare Parts:

-  Hex L-Key - SP0105 0.050" 1 + 1/16 /1 + 9/16
-  Insert Clamping Screw - according to the table above.
-  Pin - UX0003

U BACK

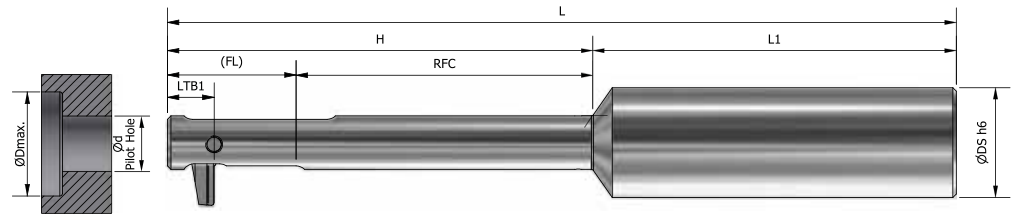

STANDARD TOOL-HOLDERS WITH USPOT INSERTS (Inch)

Ød min. PILOT HOLE	SKU TOOL- HOLDER	DESCRIPTION TOOL-HOLDER	ØDS h6	FL ⁽¹⁾	RFC ⁽²⁾	H	L	L1	LTB1 ⁽³⁾ max USPOT	ØD ⁽⁴⁾ max.	PISTON ⁽⁶⁾ PLUG MxPxL(mm)	INSERTING CLAMPING SCREW MxPxL(mm)	SERIES ⁽⁵⁾
0.315	UX2080	UX-d080-B-C16-H62-L115	0.630	0.669	1.693	2.441	4.528	2.087	0.287	0.728	UX0011/ M5x0.8x6	UX0005/ M2.5x0.35x7B	B
0.354	UX2090	UX-d090-B-C16-H62-L115	0.630	0.701	1.693	2.441	4.528	2.087	0.287	0.827			B
0.394	UX2100	UX-d100-B-C16-H62-L115	0.630	0.740	1.693	2.441	4.528	2.087	0.287	0.906			B
0.433	UX3110	UX-d110-C-C16-H80-L133	0.630	1.063	2.047	3.150	5.236	2.087	0.488	1.024	UX0011/ M5x0.8x6	UX0006/ M3x0.35x10C	C
0.472	UX3120	UX-d120-C-C16-H80-L133	0.630	1.075	2.047	3.150	5.236	2.087	0.488	1.102			C
0.512	UX3130	UX-d130-C-C16-H80-L133	0.630	1.102	2.047	3.150	5.236	2.087	0.488	1.181			C
0.551	UX4140	UX-d140-D-C20-H105-L158	0.787	1.280	2.854	4.134	6.220	2.087	0.551	1.280	UX0012/ M6x1.0x6	UX0007/ M3x0.35x13D	D
0.591	UX4150	UX-d150-D-C20-H105-L158	0.787	1.280	2.854	4.134	6.220	2.087	0.551	1.358			D
0.630	UX4160	UX-d160-D-C20-H105-L158	0.787	1.280	2.854	4.134	6.220	2.087	0.551	1.457			D
0.669	UX5170	UX-d170-E-C20-H115-L170	0.787	1.516	3.012	4.528	6.693	2.165	0.650	1.555	UX0012/ M6x1.0x6	UX0008/ M3x0.35x16E	E
0.709	UX5180	UX-d180-E-C20-H115-L170	0.787	1.516	3.012	4.528	6.693	2.165	0.650	1.634			E
0.748	UX5190	UX-d190-E-C20-H115-L170	0.787	1.516	3.012	4.528	6.693	2.165	0.650	1.732			E
0.787	UX6200	UX-d200-F-C25-H120-L175	0.984	1.713	3.012	4.724	6.890	2.165	0.740	1.811	UX0013/ M8x1.25x6	UX0009/ M4x0.5x19F	F
0.827	UX6210	UX-d210-F-C25-H120-L175	0.984	1.713	3.012	4.724	6.890	2.165	0.740	1.909			F
0.866	UX6220	UX-d220-F-C25-H120-L175	0.984	1.713	3.012	4.724	6.890	2.165	0.740	1.988			F
0.906	UX7230	UX-d230-G-C25-H120-L175	0.984	1.890	2.835	4.724	6.890	2.165	0.827	2.087	UX0013/ M8x1.25x6	UX0010/ M4x0.5x21G	G
0.945	UX7240	UX-d240-G-C25-H120-L175	0.984	1.890	2.835	4.724	6.890	2.165	0.827	2.185			G
0.984	UX7250	UX-d250-G-C25-H120-L175	0.984	1.890	2.835	4.724	6.890	2.165	0.827	2.264			G

(1) FL - Folding Length.

(2) RFC - Relief For Cutting.

(3) LTB1 - (Length to bottom) The LTB1 parameter depends on the **USPOT** insert size. The maximum permitted value is specified in the table above.

(4) The achieved tolerance for the counterbore or spotface diameter ØD is ± 0.1 mm (0.004").

(5) The insert series must match the series of the tool-holder.

(6) Piston plug for adapting various coolant systems (refer to page 47).

NOTE Tool-holders and inserts are sold separately.

UX Tool-holder Spare Parts:

-  Hex L-Key - SP0105 0.050" 1 + 1/16 /1 + 9/16
-  Insert Clamping Screw - according to the table above.
-  Pin - UX0003

ULTIMATE UBACK! CHAMFERS

A SOPHISTICATED MECHANISM THAT PERFORMS WITH A HIGH LEVEL OF ACCURACY.

The Noga MT **UCHAMF** is a specialized back chamfering tool designed for automatic operation on CNC machines. It allows for precise back countersinking or chamfering in a single pass without needing to rotate the workpiece.



SINGLE-PASS EFFICIENCY: The tool performs back-chamfering in one seamless pass, eliminating the need to stop the spindle, rotate, or flip the workpiece.

COOLANT-DRIVEN MECHANISM: The **UCHAMF** uses a patented hydraulic mechanism powered by the machine's own internal coolant pressure (minimum 6 bar/90 PSI) to open and close the insert, providing consistent and reliable operation.

HIGH PRECISION AND REPEATABILITY: The hydraulic system ensures accurate insert movement, leading to superior, consistent results in high-demand industries like aerospace, automotive, and medical.

PROTECTS PILOT HOLES: The tool's unique insert geometry is specifically designed to protect the bore and internal surface of the hole while passing through it.

EASY MAINTENANCE: The system allows for quick and easy insert replacement using a single screw. No pin required.

VERSATILITY: The tools are available in a wide range of sizes (ø 8.5 mm to ø 47 mm standard) and in both 82° and 90° angles, tailor-made options also available.


UBACK UCHAMF INSERT

SERIES AND RANGE

The **UBACK** line is divided into series or groups, with each series optimized for a specific pilot-hole range and determined by the type of insert family.


For **UCHAMF** inserts:

SERIES	Ød PILOT-HOLE RANGE mm / Inch	ØD COUNTERSINK RANGE for 82° mm / Inch	ØD COUNTERSINK RANGE for 90° mm / Inch
B	8.0-10.0 / 0.315-0.394	8.5-17.0 / 0.335 - 0.670	8.5-18.0 / 0.335 - 0.709
C	11.0-13.0 / 0.433-0.512	11.5-24.0 / 0.453-0.945	11.5-25.0 / 0.453-0.984
D	14.0-16.0 / 0.551-0.630	14.5-29.0 / 0.571-1.142	14.5-31.0 / 0.571-1.220
E	17.0-19.0 / 0.669-0.748	17.5-34.0 / 0.689-1.339	17.5-37.0 / 0.689-1.457
F	20.0-22.0 / 0.787-0.866	20.5-39.0 / 0.807-1.535	20.5-42.0 / 0.807-1.653
G	23.0-25.0 / 0.906-0.984	23.5-44.0 / 0.925-1.732	23.5-47.0 / 0.925-1.850

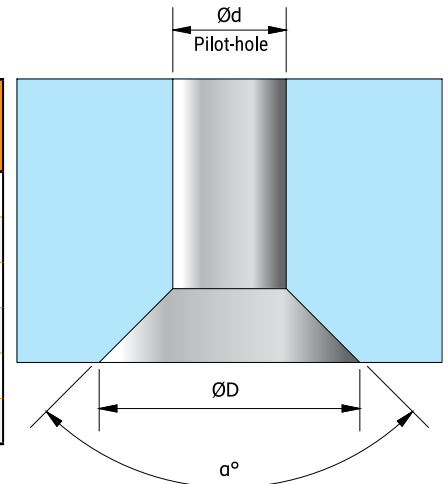

■ The **UCHAMF inserts** are offered as standard (82°, 90° countersink angles) or semi-standard solutions tailored to meet customer-specific applications. It is mandatory to match the tool-holder series with the corresponding insert series.

UCHAMF INSERTS CODING SYSTEM SPECIFICATIONS AND IDENTIFICATION:


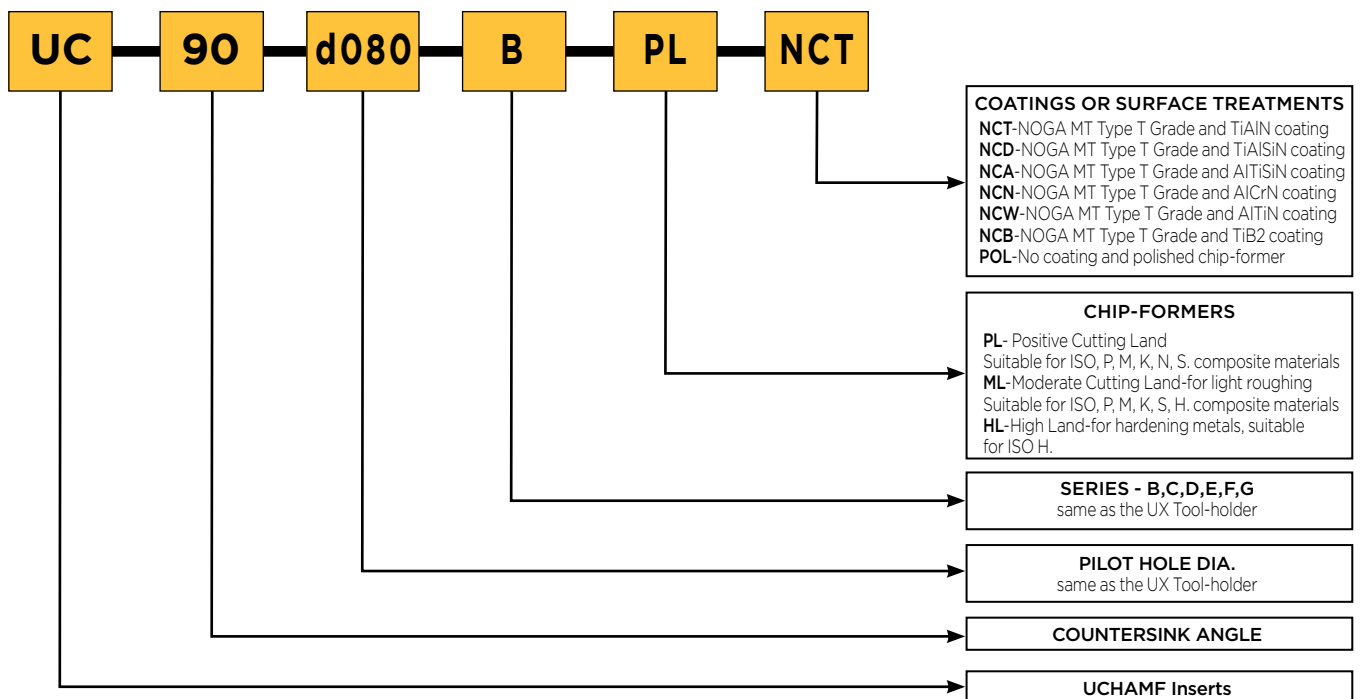


NOTES:

1. Coating: Our top recommendation is the NCT grade, featuring the versatile TiAlN PVD coating. It offers excellent thermal stability, oxidation resistance and is compatible with a wide range of materials, including mild steels, stainless steel, and Inconel. For additional options, refer to the list of available coatings on page 47.

2. Tool-holders and inserts are sold separately.

UBACK



UCHAMF 82° and 90° STANDARD INSERTS (mm/Inch)

Ødmin. PILOT HOLE mm /Inch	COUNTERSINK ANGLE $\alpha = 82^\circ$			COUNTERSINK ANGLE $\alpha = 90^\circ$			SERIES
	SKU	DESCRIPTION	Ø D MAX. mm /Inch	SKU	DESCRIPTION	Ø D MAX. mm /Inch	
8/0.315	UC2101	UC-82-d080-B-PL-NCT	15/0.591	UC2201	UC-90-d080-B-PL-NCT	16/0.630	B
9/0.354	UC2102	UC-82-d090-B-PL-NCT	16/0.630	UC2202	UC-90-d090-B-PL-NCT	17/0.669	
10/0.394	UC2103	UC-82-d100-B-PL-NCT	17/0.669	UC2203	UC-90-d100-B-PL-NCT	18/0.709	
11/0.433	UC3101	UC-82-d110-C-PL-NCT	22/0.866	UC3201	UC-90-d110-C-PL-NCT	23/0.906	C
12/0.472	UC3102	UC-82-d120-C-PL-NCT	23/0.906	UC3202	UC-90-d120-C-PL-NCT	24/0.945	
13/0.512	UC3103	UC-82-d130-C-PL-NCT	24/0.945	UC3203	UC-90-d130-C-PL-NCT	25/0.984	
14/0.551	UC4101	UC-82-d140-D-PL-NCT	27/1.063	UC4201	UC-90-d140-D-PL-NCT	29/1.142	D
15/0.591	UC4102	UC-82-d150-D-PL-NCT	28/1.102	UC4202	UC-90-d150-D-PL-NCT	30/1.181	
16/0.630	UC4103	UC-82-d160-D-PL-NCT	29/1.142	UC4203	UC-90-d160-D-PL-NCT	31/1.220	
17/0.669	UC5101	UC-82-d170-E-PL-NCT	32/1.260	UC5201	UC-90-d170-E-PL-NCT	35/1.378	E
18/0.709	UC5102	UC-82-d180-E-PL-NCT	33/1.299	UC5202	UC-90-d180-E-PL-NCT	36/1.417	
19/0.748	UC5103	UC-82-d190-E-PL-NCT	34/1.339	UC5203	UC-90-d190-E-PL-NCT	37/1.457	
20/0.787	UC6101	UC-82-d200-F-PL-NCT	37/1.457	UC6201	UC-90-d200-F-PL-NCT	40/1.575	F
21/0.827	UC6102	UC-82-d210-F-PL-NCT	38/1.496	UC6202	UC-90-d210-F-PL-NCT	41/1.614	
22/0.866	UC6103	UC-82-d220-F-PL-NCT	39/1.535	UC6203	UC-90-d220-F-PL-NCT	42/1.654	
23/0.906	UC7101	UC-82-d230-G-PL-NCT	42/1.654	UC7201	UC-90-d230-G-PL-NCT	45/1.772	G
24/0.945	UC7102	UC-82-d240-G-PL-NCT	43/1.693	UC7202	UC-90-d240-G-PL-NCT	46/1.811	
25/0.984	UC7103	UC-82-d250-G-PL-NCT	44/1.732	UC7203	UC-90-d250-G-PL-NCT	47/1.850	

UCHAMF - EXAMPLE FOR ORDERING SEMI-STANDARD INSERT:

Here is an example of coding a special **UCHAMF** insert for the application shown below:

1. $\varnothing d = 8.7\text{mm}$ (0.343").
2. Countersink Angle = 110° .
3. Material: AISI / EN AW / JIS - 7075.


The recommended tool-holder is **UX2080 / UX-d080-B-C16-H62-L115** with $\varnothing d_{\min} = 8\text{mm}$ (0.315").


The corresponding insert is **UC-110-d080-B-PL-NCT**.

IMPORTANT NOTES:

1. Ensure that the pilot-hole length (L) is less than or equal to the RFC (Relief For Cutting): $L \leq \text{RFC}$, as specified in the UBACK tool-holders table below.
2. Ensure that the countersink diameter $\varnothing D$ is less than or equal to the maximum allowable diameter: $\varnothing D \leq \varnothing D_{\max}$, as specified in the UBACK tool-holders table pages 42-43.

If you need further assistance, please don't hesitate to contact us:
Providing an application drawing or sketch, the raw material specifications,
and any other relevant information will help us assist you more effectively.

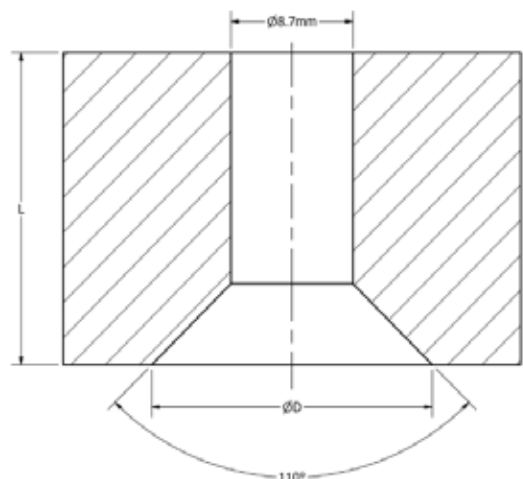

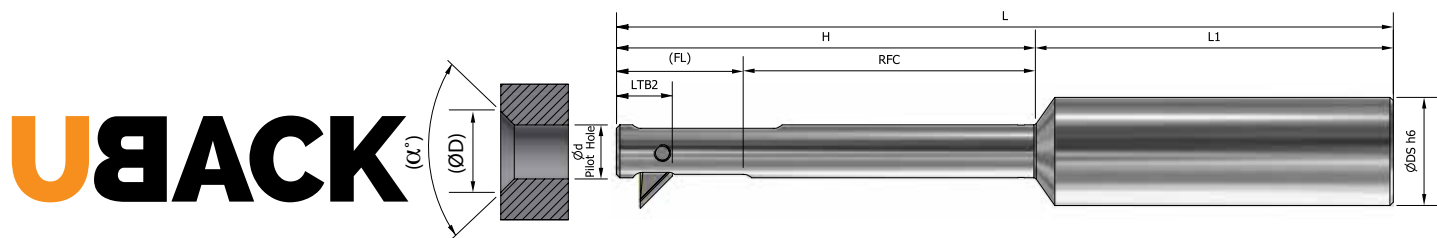

STANDARD TOOL-HOLDERS WITH UCHAMF INSERTS (mm)

Ød min. PILOT HOLE	SKU TOOL- HOLDER	DESCRIPTION TOOL-HOLDER	ØDS h6	FL ⁽¹⁾	RFC ⁽²⁾	H	L	L1	LTB2 ⁽³⁾ UCHAMF	PISTON ⁽⁵⁾ PLUG MxPxL (mm)	INSERTING CLAMPING SCREW MxPxL (mm)	SERIES ⁽⁴⁾
8	UX2080	UX-d080-B-C16-H62-L115	16	17	43	62	115	53	8.25	UX0011/ M5x0.8x6	UX0005/ M2.5x0.35x7B	B
9	UX2090	UX-d090-B-C16-H62-L115	16	17.8	43	62	115	53	8.25			B
10	UX2100	UX-d100-B-C16-H62-L115	16	18.8	43	62	115	53	8.25			B
11	UX3110	UX-d110-C-C16-H80-L133	16	27	52	80	133	53	13.6	UX0011/ M5x0.8x6	UX0006/ M3x0.35x10C	C
12	UX3120	UX-d120-C-C16-H80-L133	16	27.3	52	80	133	53	13.6			C
13	UX3130	UX-d130-C-C16-H80-L133	16	28	52	80	133	53	13.6			C
14	UX4140	UX-d140-D-C20-H105-L158	20	32.5	72.5	105	158	53	15.3	UX0012/ M6x1.0x6	UX0007/ M3x0.35x13D	D
15	UX4150	UX-d150-D-C20-H105-L158	20	32.5	72.5	105	158	53	15.3			D
16	UX4160	UX-d160-D-C20-H105-L158	20	32.5	72.5	105	158	53	15.3			D
17	UX5170	UX-d170-E-C20-H115-L170	20	38.5	76.5	115	170	55	18	UX0012/ M6x1.0x6	UX0008/ M3x0.35x16E	E
18	UX5180	UX-d180-E-C20-H115-L170	20	38.5	76.5	115	170	55	18			E
19	UX5190	UX-d190-E-C20-H115-L170	20	38.5	76.5	115	170	55	18			E
20	UX6200	UX-d200-F-C25-H120-L175	25	43.5	76.5	120	175	55	20	UX0013/ M8x1.25x6	UX0009/ M4x0.5x19F	F
21	UX6210	UX-d210-F-C25-H120-L175	25	43.5	76.5	120	175	55	20			F
22	UX6220	UX-d220-F-C25-H120-L175	25	43.5	76.5	120	175	55	20			F
23	UX7230	UX-d230-G-C25-H120-L175	25	48	72	120	175	55	22	UX0013/ M8x1.25x6	UX0010/ M4x0.5x21G	G
24	UX7240	UX-d240-G-C25-H120-L175	25	48	72	120	175	55	22			G
25	UX7250	UX-d250-G-C25-H120-L175	25	48	72	120	175	55	22			G

(1) FL - Folding Length.

(2) RFC - Relief For Cutting.

(3) LTB - (Length to bottom) parameter varies between **USPOT** and **UCHAMF** inserts.


(4) The insert series must match the series of the tool-holder.

(5) Piston plug for adapting various coolant systems (refer to page 47).

NOTE Tool-holders and inserts are sold separately.

UX Tool-holder Spare Parts:

-  Hex L-Key - SP0105 0.050" 1 + 1/16 /1 + 9/16
-  Insert Clamping Screw- according to the table above.
-  Pin - UX0003

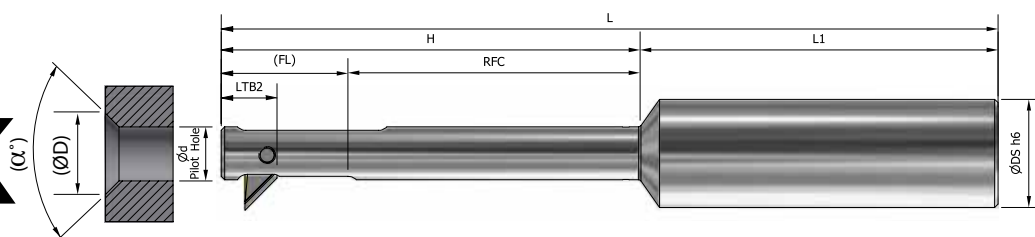


Ød min. PILOT HOLE	SKU TOOL- HOLDER	DESCRIPTION TOOL-HOLDER	ØDS h6	FL ⁽¹⁾	RFC ⁽²⁾	H	L	L1	LTB2 ⁽³⁾ UCHAMF	PISTON ⁽⁵⁾ PLUG MxPxL (mm)	INSERTING CLAMPING SCREW MxPxL (mm)	SERIES ⁽⁴⁾
0.315	UX2080	UX-d080-B-C16-H62-L115	0.630	0.669	1.693	2.441	4.528	2.087	0.325	UX0011/ M5x0.8x6	UX0005/ M2.5x0.35x7B	B
0.354	UX2090	UX-d090-B-C16-H62-L115	0.630	0.701	1.693	2.441	4.528	2.087	0.325			B
0.394	UX2100	UX-d100-B-C16-H62-L115	0.630	0.740	1.693	2.441	4.528	2.087	0.325			B
0.433	UX3110	UX-d110-C-C16-H80-L133	0.630	1.063	2.047	3.150	5.236	2.087	0.535	UX0011/ M5x0.8x6	UX0006/ M3x0.35x10C	C
0.472	UX3120	UX-d120-C-C16-H80-L133	0.630	1.075	2.047	3.150	5.236	2.087	0.535			C
0.512	UX3130	UX-d130-C-C16-H80-L133	0.630	1.102	2.047	3.150	5.236	2.087	0.535			C
0.551	UX4140	UX-d140-D-C20-H105-L158	0.787	1.280	2.854	4.134	6.220	2.087	0.602	UX0012/ M6x1.0x6	UX0007/ M3x0.35x13D	D
0.591	UX4150	UX-d150-D-C20-H105-L158	0.787	1.280	2.854	4.134	6.220	2.087	0.602			D
0.630	UX4160	UX-d160-D-C20-H105-L158	0.787	1.280	2.854	4.134	6.220	2.087	0.602			D
0.669	UX5170	UX-d170-E-C20-H115-L170	0.787	1.516	3.012	4.528	6.693	2.165	0.709	UX0012/ M6x1.0x6	UX0008/ M3x0.35x16E	E
0.709	UX5180	UX-d180-E-C20-H115-L170	0.787	1.516	3.012	4.528	6.693	2.165	0.709			E
0.748	UX5190	UX-d190-E-C20-H115-L170	0.787	1.516	3.012	4.528	6.693	2.165	0.709			E
0.787	UX6200	UX-d200-F-C25-H120-L175	0.984	1.713	3.012	4.724	6.890	2.165	0.787	UX0013/ M8x1.25x6	UX0009/ M4x0.5x19F	F
0.827	UX6210	UX-d210-F-C25-H120-L175	0.984	1.713	3.012	4.724	6.890	2.165	0.787			F
0.866	UX6220	UX-d220-F-C25-H120-L175	0.984	1.713	3.012	4.724	6.890	2.165	0.787			F
0.906	UX7230	UX-d230-G-C25-H120-L175	0.984	1.890	2.835	4.724	6.890	2.165	0.866	UX0013/ M8x1.25x6	UX0010/ M4x0.5x21G	G
0.945	UX7240	UX-d240-G-C25-H120-L175	0.984	1.890	2.835	4.724	6.890	2.165	0.866			G
0.984	UX7250	UX-d250-G-C25-H120-L175	0.984	1.890	2.835	4.724	6.890	2.165	0.866			G


(5) Piston plug for adapting various coolant systems (refer to page 47).

-  Hex L-Key - SP0105 0.050" 1 + 1/16 /1 + 9/16
-  Insert Clamping Screw- according to the table above.
-  Pin - UX0003


UBACK TOOLS - PROGRAMMING



Step 1
Move to Initial Position A
to the safe height while
the tool is rotating
(G0 Z[#Z_SAFE])



Step 2
Position A
Turn the coolant ON (M7/M8)
Wait for the coolant to engage
for the defined time:
(G4 P[#COOLANT_WAIT])



Step 3
Moving to Position B
Move rapidly down to the
pilot hole depth:
(G0 Z[#HOLE_DEPTH + #FL])




Step 4
Position B
Turn coolant OFF (M9)
Wait for the coolant to disengage
for the defined time:
(G4 P[#COOLANT_WAIT])




Step 5
Moving to Position C
Move below the workpiece to
Position C (Approx. 0.1-0.2mm),
using a controlled feed rate:
(G1 Z[#HOLE_DEPTH + #Z_SAFE]
F[#ENGAGE_FEED])




Step 6
Moving to Initial Position D
Turn coolant ON (M7/M8)
Move the tool to touch the workpiece
with a controlled approach using the
defined feed rate:
(G1 Z[#HOLE_DEPTH]
F[#ENGAGE_FEED])




Step 7
Position E
Machine the counterbore
at the defined depth
using a defined feed rate
of 80 mm/min:
(G1 Z[#HOLE_DEPTH +
#SPOT_DEPTH] F80)



Step 8
Moving to Position B
Turn coolant OFF (M9) and wait
for the coolant to disengage.
Retract the tool back to
Position B below the workpiece:
(G0 Z[#HOLE_DEPTH + #FL])



Step 9
Position B
Turn coolant ON (M7/M8).
Wait for the coolant to engage for
the defined time:
(G4 P[#COOLANT_WAIT])




Step 10
Moving to Initial Position A
Rapidly retract the tool to the safe
height above the workpiece:
(G0 Z[#Z_SAFE])
End Spindle and Program:
1. Turn the spindle OFF (M5)
2. Wait for the spindle to stop
3. End the program (M30)


1. The Folding Length (FL) is specified in the tool-holder tables. The Length To Bottom (LTB) differs between USPOT and UCHAMF inserts.
2. The illustrated operation sequence above demonstrates working with a USPOT insert but remains the same when using a UCHAMF insert; use LTB1 for USPOT and LTB2 for UCHAMF.

UBACK CHIP-FORMERS

PL
POSITIVE CUTTING LAND
Suitable for all-round purpose and
ISO, P, M, K, N, S,
as well as composite materials



ML
MODERATE CUTTING LAND
Suitable for ISO, P, M, K, S, H.
materials





HL
NEGATIVE CUTTING LAND
Suitable for ISO, P, M, K, S, H.
materials




UBACK TOOLS

INSERT REPLACEMENT

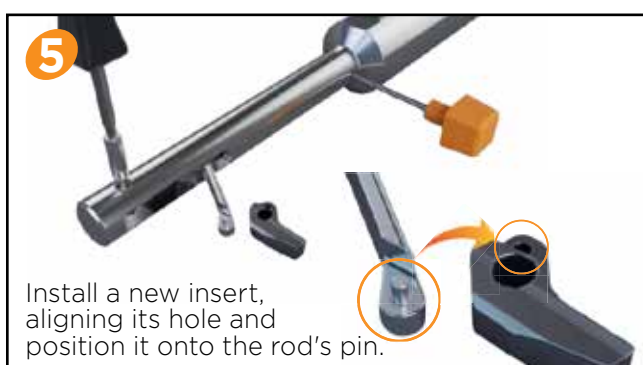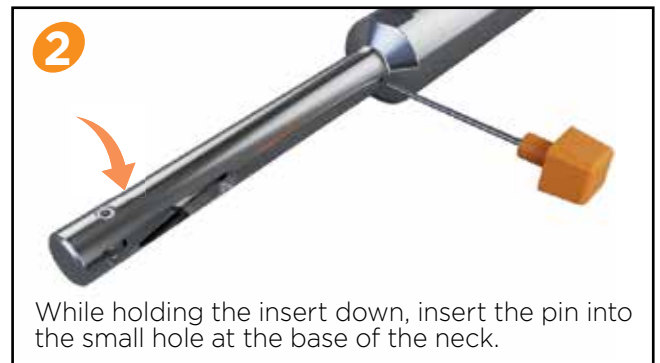


UBACK TOOLS

COUNTERBORING MACHINING GUIDELINES FOR SPECIFIC CONDITIONS




COUNTERBORE ON SHOULDER

- Fully Interrupted Cut.
- **Use external coolant only.**
- Consider reduced stability and adjust cutting parameters by reducing them by 30%.




COUNTERBORE ON SHOULDER

- Fully Interrupted Cut.
- **Use external coolant only.**
- Consider reduced stability and adjust cutting parameters by reducing them by 30%.




COUNTERBORE ON SLOPED SURFACE

- **Use external coolant only.**



COUNTERBORE ON SLOT

- Fully Interrupted Cut.
- **Use external coolant only.**
- Consider reduced stability and adjust cutting parameters by reducing them by 30%.



COUNTERBORE ON CYLINDRICAL BORE

- **Use external coolant only.**

UBACK TOOLS

CONFIGURING UBACK TOOL-HOLDERS FOR DIFFERENT COOLANT SYSTEMS

UBACK tool-holders are compatible with air, emulsion, or MQL coolant systems. When using air or MQL as the coolant, close off the back of the tool using the supplied plug screw set.



AVAILABLE COATING TYPES AND SURFACE TREATMENTS

NOGA'S Code	COATING	KEY FEATURES	APPLICATIONS	INDUSTRIES	MATERIAL EXAMPLES	ISO GROUP					
						P	M	K	N	S	H
NCT	TiAlN	Excellent thermal stability, oxidation resistance, and wear resistance.	High-speed cutting and general-purpose machining. Works in wet & dry conditions.	Aerospace, Automotive, General Engineering	AISI 304, 42CrMo4, GG (Grey Cast Iron), Ti6Al4V	√	√	√	x	√	√
NCD	TiAlSiN	Very high hardness, extreme oxidation resistance (>1200°C). Excels in dry machining at high speeds. Suitable for hardened steels >45 Rc.	High-performance machining in demanding environments.	Aerospace, Automotive, Die & Mold	Inconel 718, AISI 4140, Ti6Al4V, Hastelloy	√	√	x	x	√	√
NCA	AlTiSiN	High hardness, thermal stability, and wear resistance. Works well in dry, high-speed cutting. Suitable for hardened steels >45 Rc.	High-speed machining in extreme conditions.	Aerospace, Automotive, Precision Engineering	AISI 316, AISI H13, Hastelloy	√	√	x	x	√	√
NCN	AlCrN	High oxidation resistance (to 1100°C), toughness, abrasion resistance.	General machining in abrasive/wet conditions	Automotive, Aerospace, Die and Mold	AISI 304, AISI 1045, Grey Cast Iron (GG), AL6061, Die Steels	√	√	√	√	x	x
NCW	AlTiN	High hardness, wear resistance, and thermal stability up to 1100°C.	Ideal for heavy-duty machining and high-speed cutting. Dry & abrasive conditions.	Aerospace, Automotive, Heavy Engineering	AISI 4340, M2 HSS, Grey Cast Iron (GG)	√	√	√	x	√	x
NCB	TiB₂	Excellent thermal stability, hardness, and very high conductivity. Prevents material adhesion and BUE.	High-speed machining of non-ferrous metals.	Aerospace, Automotive, Electronics	AL7075, 6061-T6, Copper, Magnesium Alloys (AZ31), SiC composites	x	x	x	√	√	x
POL	Polishing (Surface Treatment)	Removes scratches, burrs, and micro-defects. Produces smooth finish and reduces friction.	High-speed finishing of non-ferrous materials. Improves MRR and surface aesthetics.	Aerospace, Automotive.	AL7075, 6061-T6, Copper, Magnesium Alloys (AZ31)	x	x	x	√	x	x



For additional details about our UBACK products, including the complete product range and technical guidelines, please visit our website at: <https://nogamt.com/uback/>

CUTTING RECOMMENDATIONS

(1) To ensure optimal performance and tool-life under varying conditions:









- For moderate tool-holder or workpiece stability, consider reducing feed rates by up to 10%.
- For poor tool-holder or workpiece stability, it's advisable to decrease feed rates by up to 30%.

ISO	MATERIAL		CONDITION	As is AISI/SAE/ASTM	DIN W.-Nr.
P	Non-Alloy Steel and Cast Steel Free Cutting Steel	<0.25%C	Annealed	1020	1.0044
		≥0.25%C	Annealed	1035	1.0501
		<0.55%C	Quenched and tempered	1045	1.1201
		≥0.25%C	Annealed	1055	1.0535
			Quenched and tempered	1060	1.1221
	Low Alloy and Cast Steel (less than 5% of Alloying Elements)		Annealed	G92600	1.5028
			Quenched and Tempered	4130	1.7218
				4142	1.2332
				5045	1.7006
	High-Alloy Steel, Cast Steel and Tool Steel		Annealed	H13	1.2344
			Quenched and Tempered	M33	1.3249
	Stainless Steel, Cast Steel		Ferritic / Martensitic	420	1.4021
			Martensitic		
M	Stainless Steel, Cast Steel		Austenitic, Duplex	304L	1.4306
K	Cast Iron (GG)		Ferritic / Pearlitic	Class 25	0.6015
			Pearlitic / Martensitic	Grade H20	36037
	Nodular Cast Iron (GGG)		Ferritic	60-40-18	0.7043
			Pearlitic	F33500	0.705
	Malleable Cast Iron		Ferritic	A47	0.8135
			Pearlitic	A220 Class	0.8155
N	Aluminum - Wrought Alloys		Not Hardenable	5005	3.3315
			Hardenable	7075	3.4365
	Aluminum - Cast Alloys	<12%Si	Not Hardenable	518	3.3292
		>12%Si	Hardenable	515	3.3241
			High Temperature		390
		Copper Alloys	≥ 1% Pb	Free Cutting	C36000
			Brass	C22000	2.023
			Electrolytic Copper	C63000	2.0966
	Non Metallic		Duroplastics, Fiber Plastics	Bakelite	
Hard Rubber			Ebonite		
S	High Temperature Alloys	Fe based	Annealed	330	1.4864
			Hardened	S590	1.4977
		Ni or Co based	Annealed	Inconel 825	2.4858
			Hardened	Inconel 718	2.4668
	Titanium Alloys		Cast	Nimocast K24	2.4674
			Pure	Titanium G.1	3.7024
			Alpha+Beta Alloys, Hardened	Titanium G.5	3.7165
H	Hardened steel		Hardened	HARDOX 500	
			Hardened	HARDOX EXTREME	
	Chilled Cast Iron		Cast	A532 IIIA 25% Cr	0.965
	Cast Iron		Hardened	A532 IID 20% CrMo	0.9645

CUTTING RECOMMENDATIONS


The table shown on page 48-49 presents cutting recommendations, outlining initial feed rates and cutting speed for materials group based on ISO 513 and VDI 3323 standards.

Additionally, the operator must ensure the utilization of appropriate coolant media directed to the cutting tip of the blade and right-hand machining (clockwise).

ISO	Vc cutting speed m/min. sfm	Series B fz ⁽¹⁾ feed rate mm/t. ipt	Series C fz ⁽¹⁾ feed rate mm/t. ipt	Series D fz ⁽¹⁾ feed rate mm/t. ipt	Series E fz ⁽¹⁾ feed rate mm/t. ipt	Series F fz ⁽¹⁾ feed rate mm/t. ipt	Series G fz ⁽¹⁾ feed rate mm/t. ipt	RECOMMENDED CHIP-FORMER	COOLANT
P	60 - 120 / 200 - 390	0.03 / 0.0012"	0.04 / 0.0016"	0.05 / 0.0020"	0.07 / 0.0028"	0.08 / 0.0031"	0.09 / 0.0035"		AIR / WET
	50 - 120 / 165 - 390	0.03 / 0.0012"	0.04 / 0.0016"	0.05 / 0.0020"	0.07 / 0.0028"	0.08 / 0.0031"	0.09 / 0.0035"		
	50 - 100 / 165 - 330								
	40 - 90 / 150 - 295	0.02 / 0.0008"	0.03 / 0.0012"	0.04 / 0.0016"	0.05 / 0.0020"	0.06 / 0.0024"	0.08 / 0.0031"		
M	50 - 100 / 165 - 330	0.03 / 0.0012"	0.04 / 0.0016"	0.05 / 0.0020"	0.07 / 0.0028"	0.08 / 0.0031"	0.09 / 0.0035"		WET
K	60 - 120 / 200 - 395	0.03 / 0.0012"	0.04 / 0.0016"	0.05 / 0.0020"	0.07 / 0.0028"	0.08 / 0.0031"	0.09 / 0.0035"		AIR / WET
	50 - 100 / 165 - 330	0.02 / 0.0008"	0.03 / 0.0012"	0.04 / 0.0016"	0.05 / 0.0020"	0.06 / 0.0024"	0.08 / 0.0031"		
N	100 - 160 / 330 - 525	0.05 / 0.0020"	0.06 / 0.0024"	0.08 / 0.0031"	0.10 / 0.0039"	0.12 / 0.0047"	0.14 / 0.0055"		WET
	90 - 130 / 295 - 425								
	180 - 305 / 600 - 1000								
S	40 - 80 / 130 - 260	0.02 / 0.0008"	0.03 / 0.0012"	0.04 / 0.0016"	0.05 / 0.0020"	0.06 / 0.0024"	0.08 / 0.0031"		WET
	25 - 40 / 80 - 130								
	30 - 60 / 100 - 180								
H	30 - 50 / 100 - 165	0.02 / 0.0008"	0.02 / 0.0008"	0.03 / 0.0012"	0.04 / 0.0016"	0.05 / 0.0020"	0.06 / 0.0024"		AIR
	30 - 40 / 100 - 130								
	45 - 50 / 145 - 165	0.02 / 0.0008"	0.02 / 0.0008"	0.03 / 0.0012"	0.04 / 0.0016"	0.05 / 0.0020"	0.06 / 0.0024"		
	30 - 50 / 100 - 165	0.02 / 0.0008"	0.02 / 0.0008"	0.03 / 0.0012"	0.04 / 0.0016"	0.05 / 0.0020"	0.06 / 0.0024"		

ULTIMATE **UBURR!** TOOLS

A MARK OF EXCELLENCE

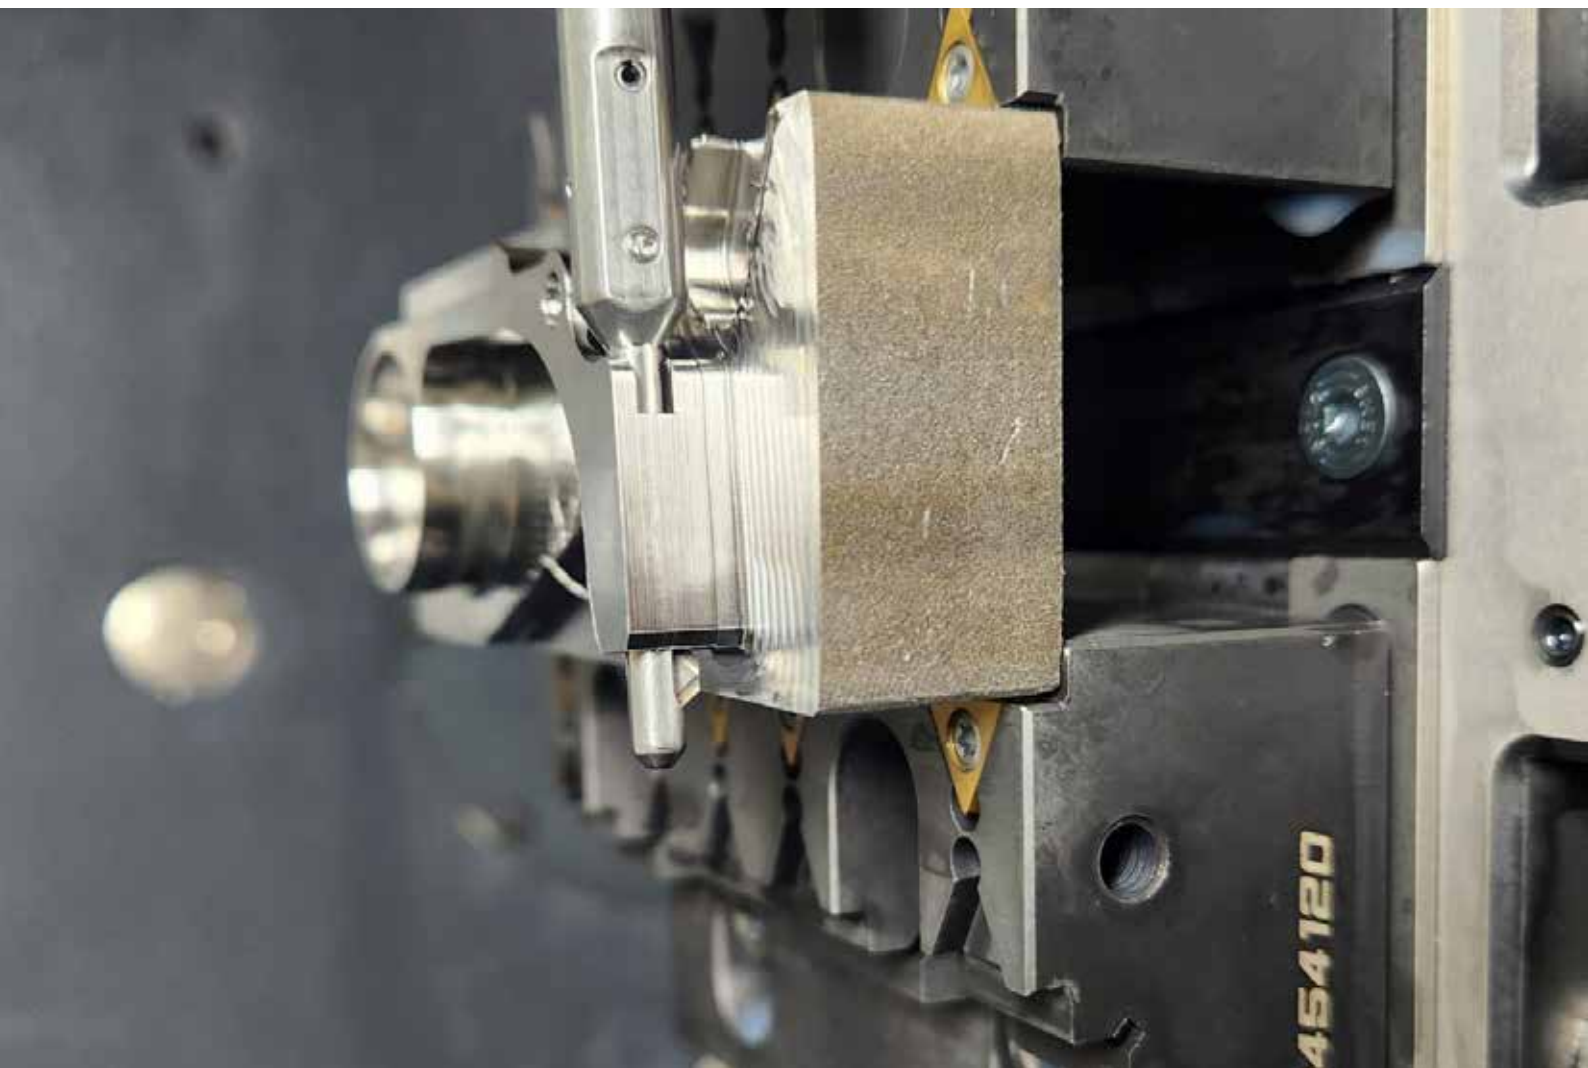

At NOGA MT, our vision is clear: to deliver unparalleled excellence through top-quality products engineered by skilled professionals and crafted from the finest materials our world has to offer. Join us as we redefine deburring with **UBURR**.

ULTIMATE **UBURR!** TOOLS

UBURR SETS NEW STANDARDS

Enter NOGA MT **UBURR** – a family of deburring tools designed to streamline the automatic deburring process, comprising two essential components.

- 1** Precision cutting blade with unique geometry with different chip-formers and sizes.
- 2** MT DURASHIELD state-of-the-art tool-holder as never seen before in the industry for the metal cutting tools.




UBURR sets a new standard in deburring efficiency and excellence.

In the realm of machining and manufacturing, deburring tools play a crucial role, ensuring that drilled holes are clean, smooth, and free from any unwanted burrs that could affect performance or aesthetics.

UBURR TOOLS

HOW DOES THE UBURR WORK?

- 1** Upon insertion, the replaceable cutting blade is initially held in the extended position, effectively eliminating the burr on the front side of the hole.
- 2** As the cutting tool encounters increased feed pressure, surpassing the preset spring tension, the blade automatically retracts while passing through the pilot-hole. The blade geometry ensures that no scratches occur on the inner surface of a drilled or threaded pilot hole.
- 3** Upon exiting the pilot-hole, spring tension once again triggers the blade to extend, effectively removing the burr on the back side of the hole during the return stroke.

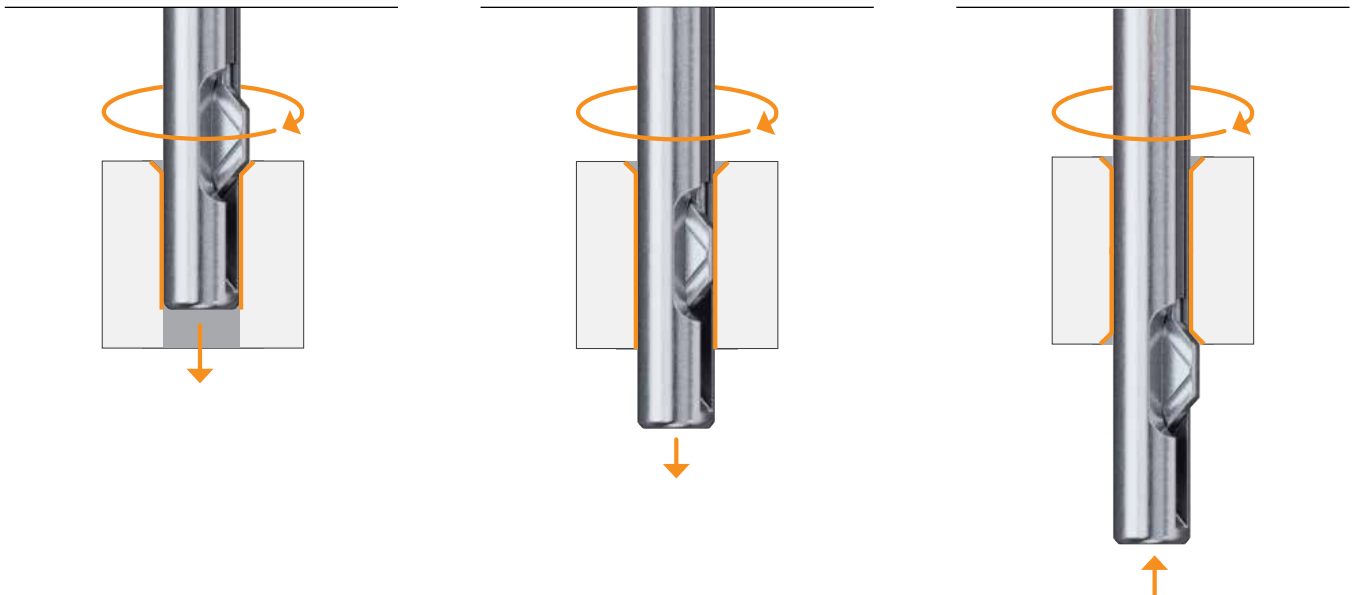

UBURR MAIN BENEFITS

OPERATIONAL EXCELLENCE

AUTOMATED EFFICIENCY:

- Achieve seamless production with single-pass automatic deburring of both front and rear hole edges, eliminating the need for manual intervention.

PRECISION PERFORMANCE:

- Consistently deliver high-quality deburring results at any production volume.

PREMIUM CONSTRUCTION:

- Manufactured from Precipitation Hardened AISI 17-4 PH for outstanding durability and dependable performance.

UBURR TOOLS

MAIN BENEFITS

VERSATILE APPLICATION

UNIVERSAL COMPATIBILITY:

- Operates effectively with both CNC machines and electric hand drills.

ADAPTIVE DESIGN:

- A single holder supports multiple pilot diameters, reducing the need for extensive tool inventory.

COMPREHENSIVE MATERIAL AND GEOMETRICAL SUPPORT:

- The blades are available with advanced TiAlN or AlTiN coatings, as well as uncoated options.
3 types of chip formers for efficient processing of various materials.



SMART DESIGN FEATURES

PLUG-AND-PLAY CONVENIENCE:

- No blade adjustments required, saving time and ensuring consistent, repeatable results.

PROTECTIVE GEOMETRY:

- Specialized blade design prevents scratches on drilled or threaded surfaces.

SIMPLIFIED MAINTENANCE:

- Quick and intuitive blade replacement minimizes downtime.

EFFICIENT INVENTORY MANAGEMENT:

- Only three blade sizes are required to cover the full pilot-hole range.

CUSTOMIZABLE SOLUTIONS:

- Tailored configurations available to meet specific production needs.


UBURR TOOLS

BLADE FEATURES

Our high-precision blades, made of High-Speed Steel (HSS) and Solid-Carbide, offer toughness and durability, enabling them to withstand high impact loads and shock during machining processes. This enhances tool reliability and minimizes the risk of tool breakage or chipping, while also exhibiting excellent resistance to wear and abrasion. They can withstand prolonged use without significant deterioration in cutting performance, extending tool life and reducing the frequency of tool replacements.

The blade's unique geometry is engineered to prevent damage to the inner surfaces of the hole while entering it, maintaining the integrity of the workpiece with every pass, and featuring a unique spherical surface.


UBURR BLADE CUTTING-EDGE GEOMETRY

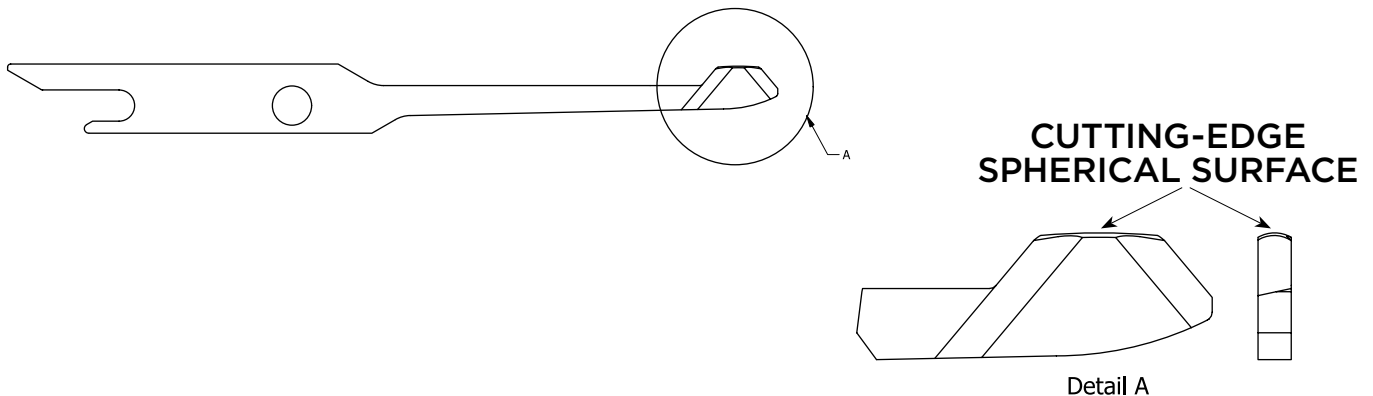

UBURR blades are available in Type 2.5, 3 and Type 5 sizes, with each type offering PL, ML or HL chip-formers, coated with TiAlN, AlTiN or uncoated.

AVAILABLE CHIP-FORMERS

PL
POSITIVE CUTTING LAND
Suitable for all-round purpose and
ISO, P, M, K, N, S,
as well as composite materials



ML
MODERATE CUTTING LAND
Suitable for ISO, P, M, K, S, H.
materials



HL
NEGATIVE CUTTING LAND
Suitable for ISO, P, M, K, S, H.
materials



UBURR TOOLS

BLADE FEATURES


Each blade (except size 2.5) comes with an rMQR rectangular engraved laser code for technical information, including machining guidelines and cutting parameters.



Download the QRBOT app to scan the Rectangular Micro QR Code (rMQR) and access the UBURR machining guidelines.



UBURR BLADES CODING SYSTEM SPECIFICATIONS AND IDENTIFICATION:

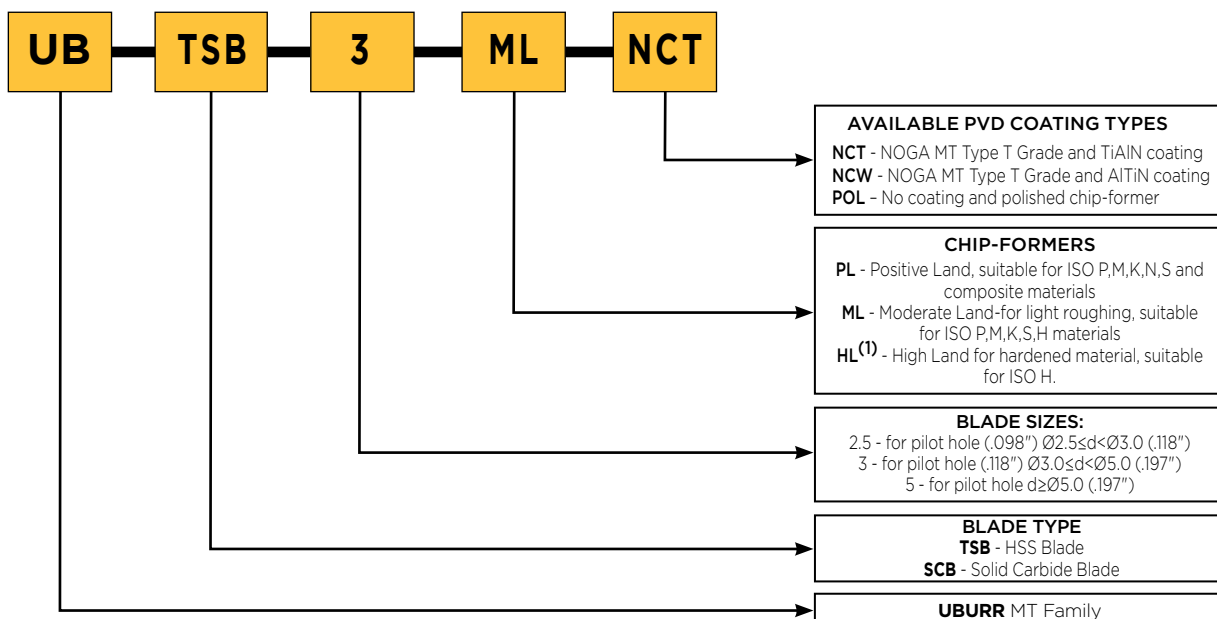


⁽¹⁾ Available only as special

UBURR TOOLS

BLADE REMOVAL




- 1 Remove the blade: Unlock the screw using an Allen key with a counterclockwise turn of the locking screw.
- 2 Push the blade by hexagon key through.
- 3 Pull up the blade from the holder.

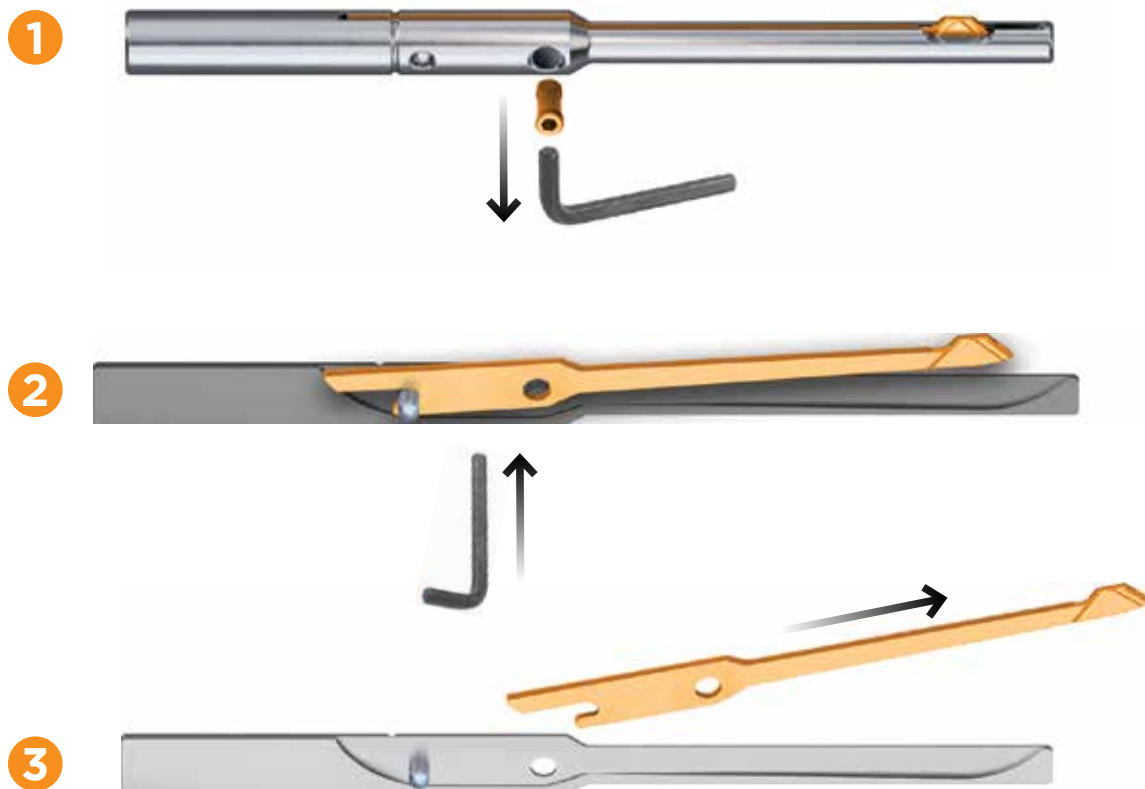

UBURR TOOLS

BLADE INSERTION

- 1 Insert the blade into the holder slot.
- 2 Push the blade into the tool pocket.
- 3 Lock the screw clockwise.

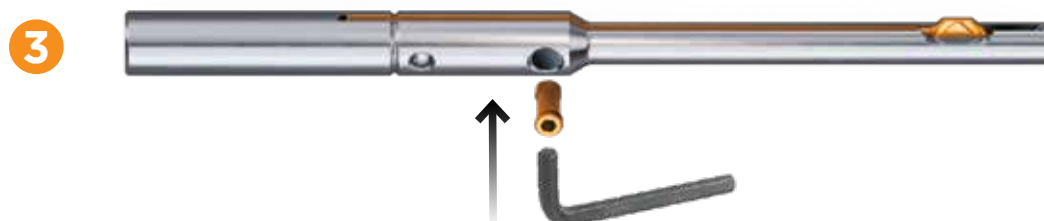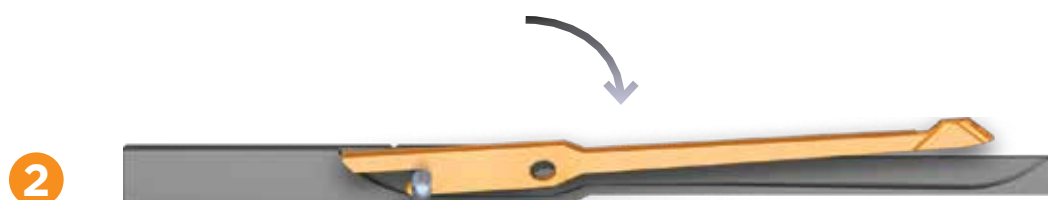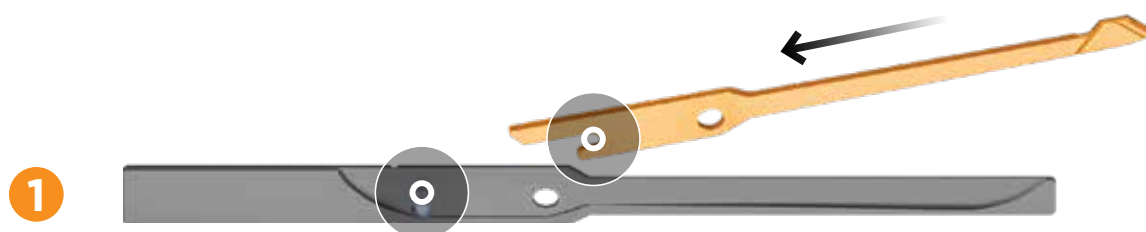

UBURR TOOLS


UBURR BLADES SPECIFICATIONS TABLE

SIZE 2.5 ⁽¹⁾ BLADE for pilot hole Ø2.5 (0.098") ≤ d < Ø3.0 (0.118")		
SKU BLADE	DESIGNATION	DESCRIPTION
UB2020 ⁽¹⁾	UB-TSB-2.5-PL	HSS Blade size 2.5 without coating and type P chip-former
UB2021 ⁽¹⁾	UB-TSB-2.5-PL-NCW	HSS blade size 2.5 with AlTiN coating and type P chip-former
UB2022 ⁽¹⁾	UB-TSB-2.5-PL-NCT	HSS blade size 2.5 with TiAlN coating and type P chip-former
SIZE 3 BLADE for pilot hole Ø3.0 (0.118") ≤ d < Ø5.0 (0.197")		
SKU BLADE	DESIGNATION	DESCRIPTION
UB2030	UB-TSB-3-PL	HSS blade size 3 without coating and type P chip-former
UB2031	UB-TSB-3-PL-NCW	HSS blade size 3 with AlTiN coating and type P chip-former
UB2032	UB-TSB-3-PL-NCT	HSS blade size 3 with TiAlN coating and type P chip-former
UB2034	UB-TSB-3-ML-NCT	HSS blade size 3 with TiAlN coating and type M chip-former
UB2036	UB-SCB-3-PL-NCT	Carbide blade size 3 with TiAlN coating and type P chip-former
UB2038	UB-SCB-3-ML-NCT	Carbide blade size 3 with TiAlN coating and type M chip-former
SIZE 5 BLADE for pilot hole d ≥ Ø5.0 (0.197")		
SKU BLADE	DESIGNATION	DESCRIPTION
UB2060	UB-TSB-5-PL	HSS blade size 5 without coating and type P chip-former
UB2061	UB-TSB-5-PL-NCW	HSS blade size 5 with AlTiN coating and type P chip-former
UB2062	UB-TSB-5-PL-NCT	HSS blade size 5 with TiAlN coating and type P chip-former
UB2063	UB-TSB-5-ML-NCT	HSS blade size 5 with TiAlN coating and type M chip-former
UB2067	UB-SCB-5-PL-NCT	Carbide blade size 5 with TiAlN coating and type P chip-former
UB2069	UB-SCB-5-ML-NCT	Carbide blade size 5 with TiAlN coating and type M chip-former

⁽¹⁾ The UB2020, UB2021, UB2022 blades are designed only for back deburring

NOGA CODE	COATING	KEY FEATURES	APPLICATIONS	INDUSTRIES	MATERIAL EXAMPLES	ISO GROUP					
						P	M	K	N	S	H
NCT	TiAlN	Excellent thermal stability, oxidation resistance, and wear resistance.	High-speed cutting and general-purpose machining. Works in wet & dry conditions.	Aerospace, Automotive, General Engineering.	AISI 304, 42CrMo4, Grey Cast Iron (GG), Ti6Al4V	✓	✓	✓	X	✓	✓
NCW	AlTiN	High hardness, wear resistance, thermal stability up to 1100°C.	Heavy-duty machining and high-speed cutting. Works in dry & abrasive conditions.	Aerospace, Automotive, Heavy Engineering.	AISI 4340, M2 HSS, Grey Cast Iron (GG)	✓	✓	✓	X	✓	X

UBURR TOOL-HOLDERS CODING SYSTEM SPECIFICATIONS AND IDENTIFICATION:

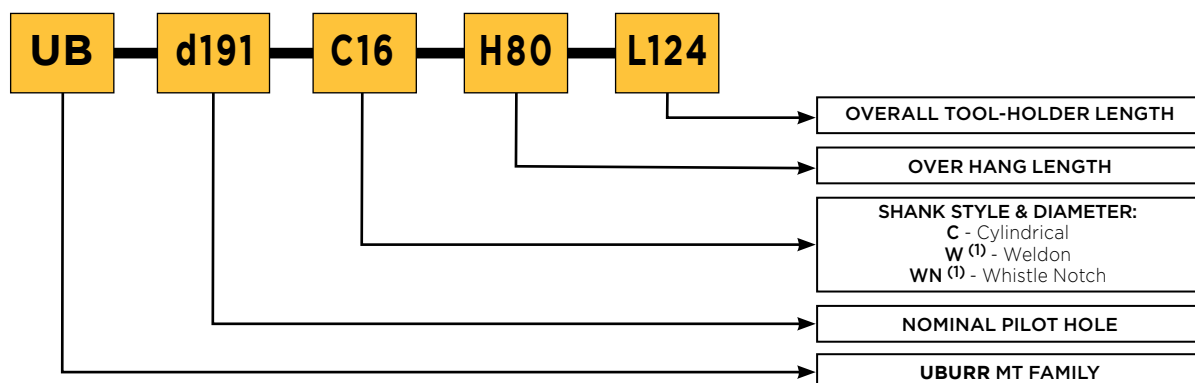

⁽¹⁾ Available only as special

UBURR TOOLS

TOOL-HOLDER FEATURES

UBURR tool-holders bearing the **DURASHIELD** mark deliver premium performance in demanding manufacturing environments. Each tool represents the pinnacle of precision engineering and reliability, manufactured from Precipitation Hardened AISI 17-4 PH for outstanding durability and performance.



UBURR TOOL-HOLDER RANGE

The **UBURR** standard tool series covers a wide range of pilot holes from Ø2.5 to Ø25mm (0.098 to 0.984”) with 0.5mm (.0197”) increments.

SUPERIOR STRENGTH: Engineered to handle heavy loads and demanding machining operations with consistent performance.

MAXIMUM TOUGHNESS: Maintains reliable operation under the most challenging industrial conditions.

ENHANCED WEAR RESISTANCE: Extended tool life significantly reduces operational costs and maintenance requirements.



PRECISION MACHINABILITY: Designed for optimal accuracy and consistent performance.

THERMAL STABILITY: Maintains structural integrity and precision even at elevated temperatures.

ADVANCED CORROSION PROTECTION: Features a specialized passivation process that provides superior protection without additional coatings.

ENVIRONMENTAL INNOVATION: The eco-friendly manufacturing process eliminates the need for additional protective layers while delivering superior performance in all working conditions.



UBURR

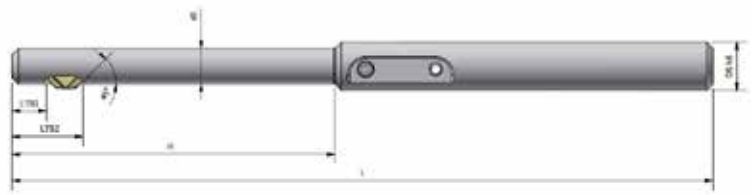

UBURR TOOL-HOLDERS (mm)

Ød min. PILOT HOLE RANGE	SKU TOOL- HOLDER	DESCRIPTION TOOL-HOLDER	+	SKU BLADE	=	DESCRIPTION SET	SKU SET	ØDS h6	LTB1 ⁽²⁾	LTB2 ⁽²⁾	H	L
2.50-3.00	UB1025	UB-d025-C08-H29-L69	+	UB2020 ⁽¹⁾	=	UBS-d025-C08-H29-L69	UB2500	8	N/A	7	29	69
3.00-3.50	UB1030	UB-d030-C08-H29-L85	+	UB2030	=	UBS-d030-C08-H29-L85	UB3000	8	4	10	29	85
3.50-4.00	UB1035	UB-d035-C08-H29-L85	+	UB2030	=	UBS-d035-C08-H29-L85	UB3001	8	4	10	29	85
4.00-4.50	UB1040	UB-d040-C08-H29-L85	+	UB2030	=	UBS-d040-C08-H29-L85	UB3002	8	4	10	29	85
4.50-5.00	UB1045	UB-d045-C08-H29-L85	+	UB2030	=	UBS-d045-C08-H29-L85	UB3003	8	4	10	29	85
5.00-5.50	UB1050	UB-d050-C08-H53-L115	+	UB2060	=	UBS-d050-C08-H53-L115	UB3004	8	4	12	53	115
5.50-6.00	UB1055	UB-d055-C08-H53-L115	+	UB2060	=	UBS-d055-C08-H53-L115	UB3005	8	4	12	53	115
6.00-6.50	UB1060	UB-d060-C08-H53-L115	+	UB2060	=	UBS-d060-C08-H53-L115	UB3006	8	4	12	53	115
6.50-7.00	UB1065	UB-d065-C08-H53-L115	+	UB2060	=	UBS-d065-C08-H53-L115	UB3007	8	4	12	53	115
7.00-7.50	UB1070	UB-d070-C08-H53-L115	+	UB2060	=	UBS-d070-C08-H53-L115	UB3008	8	4	12	53	115
7.50-8.00	UB1075	UB-d075-C08-H53-L115	+	UB2060	=	UBS-d075-C08-H53-L115	UB3009	8	4	12	53	115
8.00-8.50	UB1080	UB-d080-C10-H53-L115	+	UB2060	=	UBS-d080-C10-H53-L115	UB3010	10	4	12	53	115
8.50-9.00	UB1085	UB-d085-C10-H53-L115	+	UB2060	=	UBS-d085-C10-H53-L115	UB3011	10	4	12	53	115
9.00-9.50	UB1090	UB-d090-C10-H53-L115	+	UB2060	=	UBS-d090-C10-H53-L115	UB3012	10	4	12	53	115
9.50-10.00	UB1095	UB-d095-C10-H53-L115	+	UB2060	=	UBS-d095-C10-H53-L115	UB3013	10	4	12	53	115
10.00-10.50	UB1100	UB-d100-C10-H80-L125	+	UB2060	=	UBS-d100-C10-H80-L125	UB3014	10	4	12	80	125
10.50-11.00	UB1105	UB-d105-C10-H80-L125	+	UB2060	=	UBS-d105-C10-H80-L125	UB3015	10	4	12	80	125
11.00-11.50	UB1110	UB-d110-C10-H80-L125	+	UB2060	=	UBS-d110-C10-H80-L125	UB3016	10	4	12	80	125
11.50-12.00	UB1115	UB-d115-C12-H80-L125	+	UB2060	=	UBS-d115-C12-H80-L125	UB3017	12	4	12	80	125
12.00-12.50	UB1120	UB-d120-C12-H80-L125	+	UB2060	=	UBS-d120-C12-H80-L125	UB3018	12	4	12	80	125
12.50-13.00	UB1125	UB-d125-C12-H80-L125	+	UB2060	=	UBS-d125-C12-H80-L125	UB3019	12	4	12	80	125
13.00-13.50	UB1130	UB-d130-C12-H80-L125	+	UB2060	=	UBS-d130-C12-H80-L125	UB3020	12	4	12	80	125
13.50-14.00	UB1135	UB-d135-C12-H80-L125	+	UB2060	=	UBS-d135-C12-H80-L125	UB3021	12	4	12	80	125
14.00-14.50	UB1140	UB-d140-C12-H80-L125	+	UB2060	=	UBS-d140-C12-H80-L125	UB3022	12	4	12	80	125
14.50-15.00	UB1145	UB-d145-C12-H80-L125	+	UB2060	=	UBS-d145-C12-H80-L125	UB3023	12	4	12	80	125
15.00-15.50	UB1150	UB-d150-C12-H80-L125	+	UB2060	=	UBS-d150-C12-H80-L125	UB3024	12	4	12	80	125
15.50-16.00	UB1155	UB-d155-C12-H80-L125	+	UB2060	=	UBS-d155-C12-H80-L125	UB3025	12	4	12	80	125
16.00-16.50	UB1160	UB-d160-C16-H80-L125	+	UB2060	=	UBS-d160-C16-H80-L125	UB3026	16	4	12	80	125
16.50-17.00	UB1165	UB-d165-C16-H80-L125	+	UB2060	=	UBS-d165-C16-H80-L125	UB3027	16	4	12	80	125
17.00-17.50	UB1170	UB-d170-C16-H80-L125	+	UB2060	=	UBS-d170-C16-H80-L125	UB3028	16	4	12	80	125
17.50-18.00	UB1175	UB-d175-C16-H80-L125	+	UB2060	=	UBS-d175-C16-H80-L125	UB3029	16	4	12	80	125
18.00-18.50	UB1180	UB-d180-C16-H80-L125	+	UB2060	=	UBS-d180-C16-H80-L125	UB3030	16	4	12	80	125
18.50-19.00	UB1185	UB-d185-C16-H80-L125	+	UB2060	=	UBS-d185-C16-H80-L125	UB3031	16	4	12	80	125
19.00-19.50	UB1190	UB-d190-C16-H80-L125	+	UB2060	=	UBS-d190-C16-H80-L125	UB3032	16	4	12	80	125
19.50-20.00	UB1195	UB-d195-C20-H80-L125	+	UB2060	=	UBS-d195-C20-H80-L125	UB3033	20	4	12	80	125
20.00-20.50	UB1200	UB-d200-C20-H80-L125	+	UB2060	=	UBS-d200-C20-H80-L125	UB3034	20	4	12	80	125
20.50-21.00	UB1205	UB-d205-C20-H80-L125	+	UB2060	=	UBS-d205-C20-H80-L125	UB3035	20	4	12	80	125
21.00-21.50	UB1210	UB-d210-C20-H80-L125	+	UB2060	=	UBS-d210-C20-H80-L125	UB3036	20	4	12	80	125

UBURR

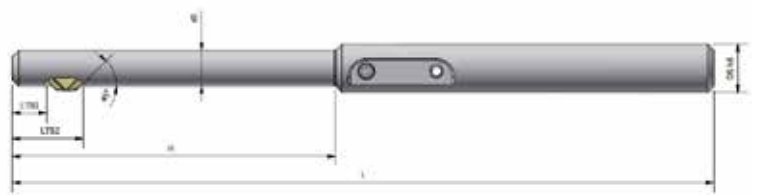

UBURR TOOL-HOLDERS (mm)

Ød min. PILOT HOLE RANGE	SKU TOOL- HOLDER	DESCRIPTION TOOL-HOLDER	+	SKU BLADE	=	DESCRIPTION SET	SKU SET	ØDS h6	LTB1 ⁽²⁾	LTB2 ⁽²⁾	H	L
21.50-22.00	UB1215	UB-d215-C20-H80-L125	+	UB2060	=	UBS-d215-C20-H80-L125	UB3037	20	4	12	80	125
22.00-22.50	UB1220	UB-d220-C20-H80-L125	+	UB2060	=	UBS-d220-C20-H80-L125	UB3038	20	4	12	80	125
22.50-23.00	UB1225	UB-d225-C20-H80-L125	+	UB2060	=	UBS-d225-C20-H80-L125	UB3039	20	4	12	80	125
23.00-23.50	UB1230	UB-d230-C20-H80-L125	+	UB2060	=	UBS-d230-C20-H80-L125	UB3040	20	4	12	80	125
23.50-24.00	UB1235	UB-d235-C20-H80-L125	+	UB2060	=	UBS-d235-C20-H80-L125	UB3041	20	4	12	80	125
24.00-24.50	UB1240	UB-d240-C20-H80-L125	+	UB2060	=	UBS-d240-C20-H80-L125	UB3042	20	4	12	80	125
24.50-25.00	UB1245	UB-d245-C20-H80-L125	+	UB2060	=	UBS-d245-C20-H80-L125	UB3043	20	4	12	80	125
25.00-25.50	UB1250	UB-d250-C20-H80-L125	+	UB2060	=	UBS-d250-C20-H80-L125	UB3044	20	4	12	80	125


(1) The **UB2020** blade is designed only for back deburring.

(2) **LTB** (Length to Blade)

UB Tool-holder Spare Parts:

-  Hex L-Key - SP0105 0.050" 1 + 1/16 /1 + 9/16
-  Blade Clamping Screw - UB0021 M2.5 X 0.35



UBURR



UBURR TOOL-HOLDERS (Inch)

Ød min. PILOT HOLE RANGE	SKU TOOL- HOLDER	DESCRIPTION TOOL-HOLDER	+	SKU BLADE	=	DESCRIPTION SET	SKU SET	ØDS h6	LTB1 ⁽²⁾	LTB2 ⁽²⁾	H	L
0.098-0.118	UB1025	UB-d025-C08-H29-L69	+	UB2020 ⁽¹⁾	=	UBS-d025-C08-H29-L69	UB2500	0.315	N/A	0.276	1.142	2.717
0.118-0.138	UB1030	UB-d030-C08-H29-L85	+	UB2030	=	UBS-d030-C08-H29-L85	UB3000	0.315	0.157	0.394	1.142	3.35
0.138-0.157	UB1035	UB-d035-C08-H29-L85	+	UB2030	=	UBS-d035-C08-H29-L85	UB3001	0.315	0.157	0.394	1.142	3.35
0.157-0.177	UB1040	UB-d040-C08-H29-L85	+	UB2030	=	UBS-d040-C08-H29-L85	UB3002	0.315	0.157	0.394	1.142	3.35
0.177-0.197	UB1045	UB-d045-C08-H29-L85	+	UB2030	=	UBS-d045-C08-H29-L85	UB3003	0.315	0.157	0.394	1.142	3.35
0.197-0.217	UB1050	UB-d050-C08-H53-L115	+	UB2060	=	UBS-d050-C08-H53-L115	UB3004	0.315	0.157	0.472	2.087	4.53
0.217-0.236	UB1055	UB-d055-C08-H53-L115	+	UB2060	=	UBS-d055-C08-H53-L115	UB3005	0.315	0.157	0.472	2.087	4.53
0.236-0.256	UB1060	UB-d060-C08-H53-L115	+	UB2060	=	UBS-d060-C08-H53-L115	UB3006	0.315	0.157	0.472	2.087	4.53
0.256-0.276	UB1065	UB-d065-C08-H53-L115	+	UB2060	=	UBS-d065-C08-H53-L115	UB3007	0.315	0.157	0.472	2.087	4.53
0.276-0.295	UB1070	UB-d070-C08-H53-L115	+	UB2060	=	UBS-d070-C08-H53-L115	UB3008	0.315	0.157	0.472	2.087	4.53
0.295-0.315	UB1075	UB-d075-C08-H53-L115	+	UB2060	=	UBS-d075-C08-H53-L115	UB3009	0.315	0.157	0.472	2.087	4.53
0.315-0.335	UB1080	UB-d080-C10-H53-L115	+	UB2060	=	UBS-d080-C10-H53-L115	UB3010	0.394	0.157	0.472	2.087	4.53
0.335-0.354	UB1085	UB-d085-C10-H53-L115	+	UB2060	=	UBS-d085-C10-H53-L115	UB3011	0.394	0.157	0.472	2.087	4.53
0.354-0.374	UB1090	UB-d090-C10-H53-L115	+	UB2060	=	UBS-d090-C10-H53-L115	UB3012	0.394	0.157	0.472	2.087	4.53
0.374-0.394	UB1095	UB-d095-C10-H53-L115	+	UB2060	=	UBS-d095-C10-H53-L115	UB3013	0.394	0.157	0.472	2.087	4.53
0.394-0.413	UB1100	UB-d100-C10-H80-L125	+	UB2060	=	UBS-d100-C10-H80-L125	UB3014	0.394	0.157	0.472	3.15	4.92
0.413-0.433	UB1105	UB-d105-C10-H80-L125	+	UB2060	=	UBS-d105-C10-H80-L125	UB3015	0.394	0.157	0.472	3.15	4.92
0.433-0.453	UB1110	UB-d110-C10-H80-L125	+	UB2060	=	UBS-d110-C10-H80-L125	UB3016	0.394	0.157	0.472	3.15	4.92
0.453-0.472	UB1115	UB-d115-C12-H80-L125	+	UB2060	=	UBS-d115-C12-H80-L125	UB3017	0.472	0.157	0.472	3.15	4.92
0.472-0.492	UB1120	UB-d120-C12-H80-L125	+	UB2060	=	UBS-d120-C12-H80-L125	UB3018	0.472	0.157	0.472	3.15	4.92
0.492-0.512	UB1125	UB-d125-C12-H80-L125	+	UB2060	=	UBS-d125-C12-H80-L125	UB3019	0.472	0.157	0.472	3.15	4.92
0.512-0.531	UB1130	UB-d130-C12-H80-L125	+	UB2060	=	UBS-d130-C12-H80-L125	UB3020	0.472	0.157	0.472	3.15	4.92
0.531-0.551	UB1135	UB-d135-C12-H80-L125	+	UB2060	=	UBS-d135-C12-H80-L125	UB3021	0.472	0.157	0.472	3.15	4.92
0.551-0.571	UB1140	UB-d140-C12-H80-L125	+	UB2060	=	UBS-d140-C12-H80-L125	UB3022	0.472	0.157	0.472	3.15	4.92
0.571-0.591	UB1145	UB-d145-C12-H80-L125	+	UB2060	=	UBS-d145-C12-H80-L125	UB3023	0.472	0.157	0.472	3.15	4.92
0.591-0.610	UB1150	UB-d150-C12-H80-L125	+	UB2060	=	UBS-d150-C12-H80-L125	UB3024	0.472	0.157	0.472	3.15	4.92
0.610-0.630	UB1155	UB-d155-C12-H80-L125	+	UB2060	=	UBS-d155-C12-H80-L125	UB3025	0.472	0.157	0.472	3.15	4.92
0.630-0.650	UB1160	UB-d160-C16-H80-L125	+	UB2060	=	UBS-d160-C16-H80-L125	UB3026	0.630	0.157	0.472	3.15	4.92
0.650-0.669	UB1165	UB-d165-C16-H80-L125	+	UB2060	=	UBS-d165-C16-H80-L125	UB3027	0.630	0.157	0.472	3.15	4.92
0.669-0.689	UB1170	UB-d170-C16-H80-L125	+	UB2060	=	UBS-d170-C16-H80-L125	UB3028	0.630	0.157	0.472	3.15	4.92
0.689-0.709	UB1175	UB-d175-C16-H80-L125	+	UB2060	=	UBS-d175-C16-H80-L125	UB3029	0.630	0.157	0.472	3.15	4.92
0.709-0.728	UB1180	UB-d180-C16-H80-L125	+	UB2060	=	UBS-d180-C16-H80-L125	UB3030	0.630	0.157	0.472	3.15	4.92
0.728-0.748	UB1185	UB-d185-C16-H80-L125	+	UB2060	=	UBS-d185-C16-H80-L125	UB3031	0.630	0.157	0.472	3.15	4.92
0.748-0.768	UB1190	UB-d190-C16-H80-L125	+	UB2060	=	UBS-d190-C16-H80-L125	UB3032	0.630	0.157	0.472	3.15	4.92
0.768-0.787	UB1195	UB-d195-C20-H80-L125	+	UB2060	=	UBS-d195-C20-H80-L125	UB3033	0.787	0.157	0.472	3.15	4.92
0.787-0.807	UB1200	UB-d200-C20-H80-L125	+	UB2060	=	UBS-d200-C20-H80-L125	UB3034	0.787	0.157	0.472	3.15	4.92
0.807-0.827	UB1205	UB-d205-C20-H80-L125	+	UB2060	=	UBS-d205-C20-H80-L125	UB3035	0.787	0.157	0.472	3.15	4.92
0.827-0.846	UB1210	UB-d210-C20-H80-L125	+	UB2060	=	UBS-d210-C20-H80-L125	UB3036	0.787	0.157	0.472	3.15	4.92

UBURR

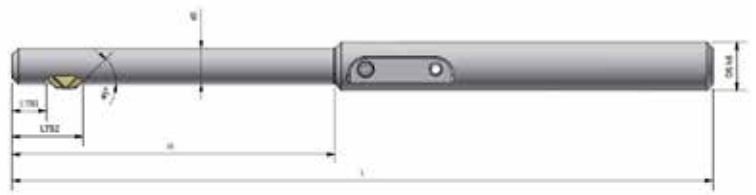

UBURR TOOL-HOLDERS (Inch) cont'd.

Ød min. PILOT HOLE RANGE	SKU TOOL- HOLDER	DESCRIPTION TOOL-HOLDER	+	SKU BLADE	=	DESCRIPTION SET	SKU SET	ØDS h6	LTB1 ⁽²⁾	LTB2 ⁽²⁾	H	L
0.846-0.866	UB1215	UB-d215-C20-H80-L125	+	UB2060	=	UBS-d215-C20-H80-L125	UB3037	0.787	0.157	0.472	3.15	4.92
0.866-0.886	UB1220	UB-d220-C20-H80-L125	+	UB2060	=	UBS-d220-C20-H80-L125	UB3038	0.787	0.157	0.472	3.15	4.92
0.886-0.906	UB1225	UB-d225-C20-H80-L125	+	UB2060	=	UBS-d225-C20-H80-L125	UB3039	0.787	0.157	0.472	3.15	4.92
0.906-0.925	UB1230	UB-d230-C20-H80-L125	+	UB2060	=	UBS-d230-C20-H80-L125	UB3040	0.787	0.157	0.472	3.15	4.92
0.925-0.945	UB1235	UB-d235-C20-H80-L125	+	UB2060	=	UBS-d235-C20-H80-L125	UB3041	0.787	0.157	0.472	3.15	4.92
0.945-0.965	UB1240	UB-d240-C20-H80-L125	+	UB2060	=	UBS-d240-C20-H80-L125	UB3042	0.787	0.157	0.472	3.15	4.92
0.965-0.984	UB1245	UB-d245-C20-H80-L125	+	UB2060	=	UBS-d245-C20-H80-L125	UB3043	0.787	0.157	0.472	3.15	4.92
0.984-1.004	UB1250	UB-d250-C20-H80-L125	+	UB2060	=	UBS-d250-C20-H80-L125	UB3044	0.787	0.157	0.472	3.15	4.92

(1) The **UB2020** blade is designed only for back deburring.

(2) **LTB** (Length to Blade)

UB Tool-holder Spare Parts:

- Hex L-Key - SP0105 0.050" 1 + 1/16 /1 + 9/16
- Blade Clamping Screw - UB0021 M2.5 X 0.35



For additional details about our UBURR line, including the complete product range and technical guidelines, please visit our website at: <https://nogamt.com/products/uburr-2/>

CUTTING RECOMMENDATIONS

The table shown on page 64-65 presents cutting recommendations, outlining initial feed rates and cutting speed for materials group based on ISO 513 and VDI 3323 standards.





(1) To ensure optimal performance and tool-life under varying conditions:

- For moderate tool-holder or workpiece stability, consider reducing feed rates by up to 10%.
- For poor tool-holder or workpiece stability, it's advisable to decrease feed rates by up to 30%.

Additionally, the operator must ensure the utilization of appropriate coolant media directed to the cutting tip of the blade and right-hand machining (clockwise).

CUTTING RECOMMENDATIONS

ISO	MATERIAL		CONDITION	As is AISI/SAE/ASTM	DIN W.-Nr.	
P	Non-Alloy Steel and Cast Steel Free Cutting Steel	<0.25%C	Annealed	1020	1.0044	
		≥0.25%C	Annealed	1035	1.0501	
		<0.55%C	Quenched and tempered	1045	1.1201	
		≥0.55%C	Annealed	1055	1.0535	
			Quenched and tempered	1060	1.1221	
	Low Alloy and Cast Steel (less than 5% of Alloying Elements)		Annealed	G92600	1.5028	
			Quenched and Tempered	4130	1.7218	
				4142	1.2332	
				5045	1.7006	
	High-Alloy Steel, Cast Steel and Tool Steel		Annealed	H13	1.2344	
Quenched and Tempered			M33	1.3249		
Stainless Steel, Cast Steel		Ferritic / Martensitic	420	1.4021		
		Martensitic				
M	Stainless Steel, Cast Steel		Austenitic, Duplex	304L	1.4306	
K	Grey Cast Iron (GG)		Ferritic / Pearlitic	Class 25	0.6015	
			Pearlitic / Martensitic	Grade H20	0.36037	
	Nodular Cast Iron (GGG)		Ferritic	60-40-18	0.7043	
			Pearlitic	F33500	0.7050	
	Malleable Cast Iron		Ferritic	A47	0.8135	
Pearlitic			A220 Class	0.8155		
N	Aluminum - Wrought Alloys		Not Hardenable	5005	3.3315	
			Hardenable	7075	3.4365	
	Aluminum - Cast Alloys		<12%Si	Not Hardenable	518	3.3292
			>12%Si	Hardenable	515	3.3241
	Copper Alloys		≥ 1% Pb	High Temperature	390	
				Free Cutting	C36000	2.0375
				Brass	C22000	2.0230
				Electrolytic Copper	C63000	2.0966
	Non Metallic		Duroplastics, Fiber Plastics	Bakelite		
			Hard Rubber	Ebonite		
S	High Temperature Alloys	Fe based	Annealed	330	1.4864	
			Hardened	S590	1.4977	
		Ni or Co based	Annealed	Inconel 825	2.4858	
			Hardened	Inconel 718	2.4668	
			Cast	Nimocast K24	2.4674	
	Titanium Alloys		Pure	Titanium G.1	3.7024	
			Alpha+Beta Alloys, Hardened	Titanium G.5	3.7165	
H	Hardened steel		Hardened	HARDOX 500		
			Hardened	HARDOX EXTREME		
	Chilled Cast Iron		Cast	A532 IIIA 25% Cr	0.9650	
	Cast Iron		Hardened	A532 IIID 20% CrMo	0.9645	
C	Carbon Fiber Re-inforced Plastics (CFRP)		Cured	—		
	Glass Fiber Re-inforced Plastics (GFRP)					

	HSS BLADE		CARBIDE BLADE	HSS or CARBIDE		
	Vc cutting speed ⁽¹⁾		Vc cutting speed ⁽¹⁾	fr feed rate ⁽¹⁾		
ISO	UNCOATED m/min. sfm	COATED m/min. sfm	COATED m/min. sfm	COATED/ UNCOATED mm/rev ipr	RECOMMENDED CHIP-FORMER	COOLANT
P	25-45 80-150	45-65 100-165	60-120 200-390	0.08 - 0.20/ 0.003 - 0.008		AIR / WET
	20-45 80-150	35-65 115-165	50-120 165-395	0.08 - 0.20/ 0.003 - 0.008		
	20-40 65-130	35-55 115-180	50-100 165-330			
	15-35 50-115	30-50 100-165	45-90 150-295	0.08 - 0.15/ 0.003 - 0.006		
M	15-30 50-100	30-55 100-180	50-100 165-330	0.08 - 0.15/ 0.003 - 0.006		WET
K	20-35 65-115	35-55 115-180	60-120 200-395	0.08 - 0.25/ 0.003 - 0.012		AIR / WET
	30-70 100-230	40-90 130-295	50-100 165-330	0.08 - 0.20/ 0.003 - 0.008		
N	50-70 165-230	75-120 245-395	100-160 330-525	0.10 - 0.30/ 0.004 - 0.012		WET
	30-60 100-200	45-100 150-330	90-130 295-425			
	60-100 195-330	90-150 295-490	180-305 600-1000			
S	10-15 33-50	15-35 50-115	40-80 130-260	0.10 - 0.20/ 0.004 - 0.008		WET
	NOT RECOMMENDED	10-15 33-50	25-40 80-130			
	10-15 33-50	15-20 50-65	30-60 100-165			
H	NOT RECOMMENDED	10-20 10-20 30-65	30-50 100-165	0.04 - 0.06/ 0.0015 - 0.0024		AIR
		10-15 30-50	30-40 100-130			
		15-20 50-65	45-50 145-165			
		10-20 30-65	30-50 100-165			
C	NOT RECOMMENDED		90-140 295 - 460	0.05 - 0.25 / 0.002 - 0.010		AIR/ WET
			90-350 295 - 1150			
Recommended with special diamond coating or DLC						

Recommended with
special diamond coating
or DLC

ULTIMATE UFIBER! INTRO KIT

THE AGENT'S CASE_{UF9000}

ADVANCED CERAMIC BRUSHES

● ALL-IN-ONE ● READY-TO-SHOW ● BUILT-TO-IMPRESS



Take your tooling presentation to the next level with the **ULTIMATE AGENT CASE**, the perfect hands-on sales kit featuring NOGA MT's breakthrough **U-Series** solutions:

Take your finishing to the next level with the **UFIBER INTRO KIT**, featuring point and end-type brushes engineered for tight spaces, complex geometries, and a wide range of materials.



UFIBER Advanced ceramic fiber brushes for high-end surface finishing.

Perfect for:

- Sales agents and global partners
- Live demos at customer sites
- Exhibitions & training sessions
- Distributor onboarding and technical education

Why it matters:

- Showcases NOGA MT's full **USERIES** in one sleek, organized kit
- Support customer discussions with real samples
- Boosts confidence and conversation with physical demonstration
- Establishes your brand as a forward-thinking tool leader

Plug & Play 8 POINT BRUSHES Ø 1.5 mm / 0.059" - 4 Grits: **#200, #600, #800, #1200**
 Ø 3.0 mm / 0.118" - 4 Grits: **#200, #600, #800, #1200**

16 END BRUSHES Ø 5.0 mm / 0.197" **"FLAT DESIGN"** - 10 Grits: **#150, #200, #400, #600, #800, #1000, #1200, #2000, #3000, #6000**
 Ø 5.0 mm / 0.197" **"ANGLED DESIGN"** - 6 Grits: **#150, #400, #600, #800, #1000, #1200**

Attractively displayed in a compact and durable hard-shell aluminum case

ULTIMATE DEMO! INTRO KITS

THE **AGENT'S** CASES

UX9000
UX9001
UX9002

THREE COMPLETE DEMO KITS FOR THE **USERIES** TOOLS

The **NOGAMT - AGENT'S, MINI & MICRO** DEMO KITS provide a compact and economical solution for presenting the key technologies of the **NOGAMT USeries**.

Designed for sales engineers, distributors, and application specialists, these kits enable quick and effective demonstrations of deburring, finishing, and back counterboring solutions during customer visits, technical meetings, and training sessions.

Applications

UFIBER Advanced ceramic fiber tools for precision deburring, grinding, finishing and polishing.

UBURR For reliable front & back deburring solutions

UBACK Toolholder Sets: **USPOT** insert for back counterboring or spotfacing of a drilled through hole.
UCHAMF insert for back chamfering or countersink of a drilled through hole.

Key Benefits

- Economic Demo Solution.
- Cost-effective demonstration kit for distributors and sales teams.
- Compact, portable & lightweight, ideal for customer visits and technical meetings.
- Practical essential tool selection for real machining demonstrations.
- Professional Presentation - helps clearly explain **NOGAMT** solutions.



AGENT'S CASE
UX9000

MINI CASE
UX9001

MICRO CASE
UX9002

A compact and economical way to present the NOGA MT USeries solutions.

NOGAMT DIGITAL APPLICATIONS


SMART APPS. FOR FASTER SELECTION, CONFIGURATION AND TROUBLESHOOTING

Explore our digital solutions designed to support deburring, spotfacing, chamfering and surface-finishing applications.

UFIBER AI

1 AI powered assistant for ceramic fiber brush selection and troubleshooting.


-  The App recommends the appropriate brush for the workpiece.
-  Upload drawings, images and process details.
-  Diagnostic mode for faster root-cause analysis.

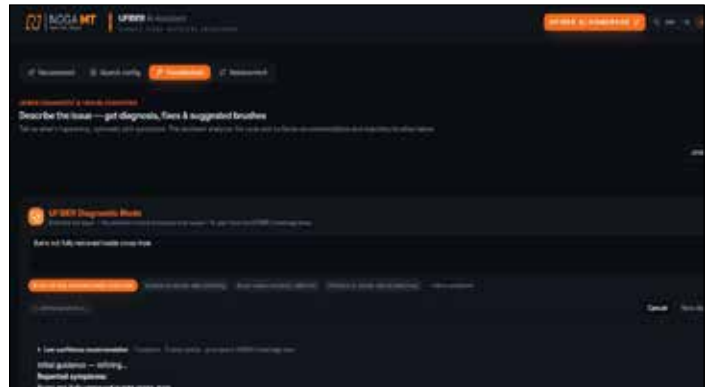

USPOT/UCHAMF Configurator

2 Fast and accurate tool configuration for internal spotfacing and chamfering applications.


-  Generate insert and holder combinations.
-  Validate pilot hole, diameter and length limits.
-  Provides immediate technical selection.

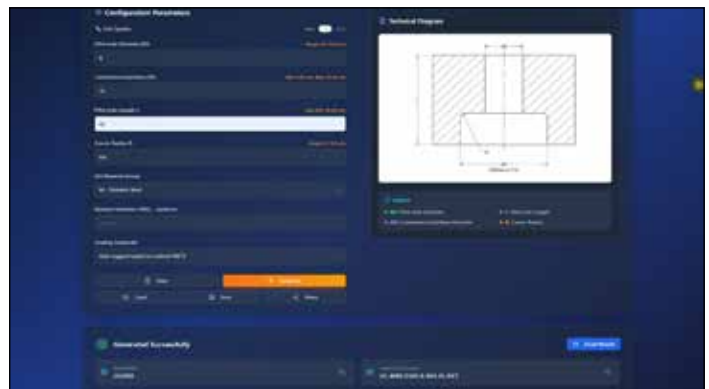

UBURR Calculator

3 Practical calculator and tool finder for front and back deburring applications.

-  Tool finder for blade selection.
-  Support for inclined and tube applications.
-  Simple visual validation for application fit.

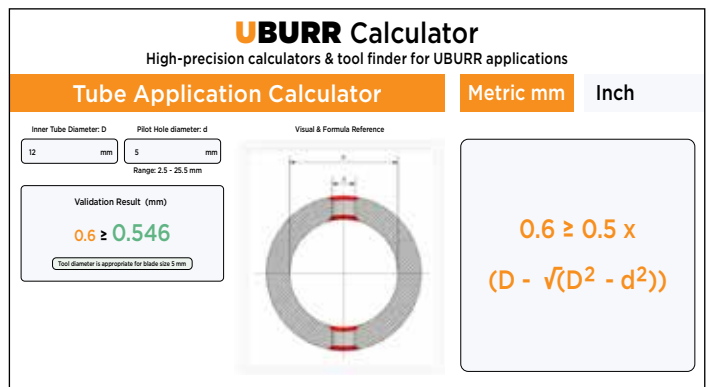

Faster Selection

Reduce setup time and improve productivity.



Better Technical Support

Expert guidance and diagnostics when you need it.



Smarter Application Guidance

Data-driven tools that help you get the right result, every time.



Discover the **NOGAMT** digital experience at www.nogamt.com

Ask our team for online access to the new app, technical support, or a live demonstration.

ULTIMATE SERIES

QUICK, EFFECTIVE, RELIABLE

All NOGA products meet the strict requirements of ISO 9001 and ISO 14001.

NOGA reserves the right to make changes in any of its products without prior notice. © Copyright NOGA Engineering & Technology (2008) Ltd. All rights reserved. No part of this publication may be reproduced, transcribed, stored in an electronic retrieval system, translated into any language or computer language, or be transmitted in any form whatsoever without the prior written consent of the publisher.

To learn more about NOGA MT and explore our full product range, visit our website at: www.nogamt.com



For further information we invite you to visit our website:
www.nogamt.com
or scan the QR code



NOGA ENGINEERING & TECHNOLOGY (2008) LTD

P.O.B 55 Dora Industrial Park, Shlomi 2283200, Israel

Tel: 972-4-9808080 | Fax: 972-4-9808638 | E-mail: noga@noga.com

CA103E0427